



COAXIAL ADAPTER

SMA-SMA Standard Series

Features

- ✓ High performance design
- ✓ Frequency up to 10 GHz
- ✓ Low VSWR




Specifications


PART NUMBER	MVE1710B
DESCRIPTION	50ohm SMA Male Reverse To SMA Female, DC-10GHz Adapter
ELECTRICAL	MATERIALS
FREQUENCY: DC-10GHz IMPEDANCE: 50OHM VSWR: 1.3:1 MAX. WORKING VOLTAGE: 335Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. INSULATOR RESISTANCE: 500MEGAOHM MIN. INSERTION LOSS: 0.1dB MAX.	BODY: BRASS, GOLD PLATED CONTACT: BE. COPPER, GOLD PLATED INSULATOR: PTFE SHELL: BRASS, GOLD PLATED C-RING: BE. COPPER GASKET: SILICON

TOLERANCE: X=±0.2 X.X=±0.1 .XX=±0.05

Outline Drawing (Unit: mm)

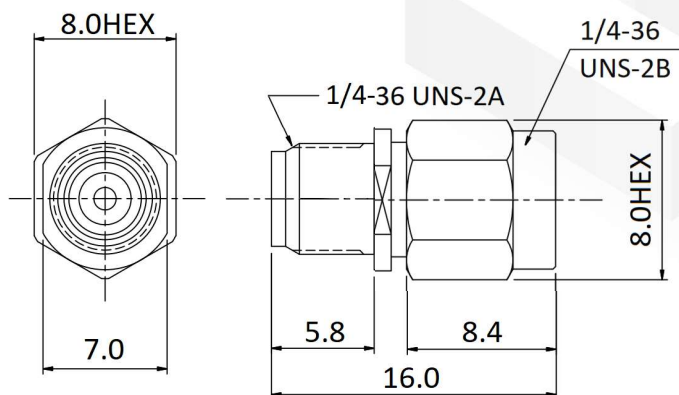

Typical Test Result

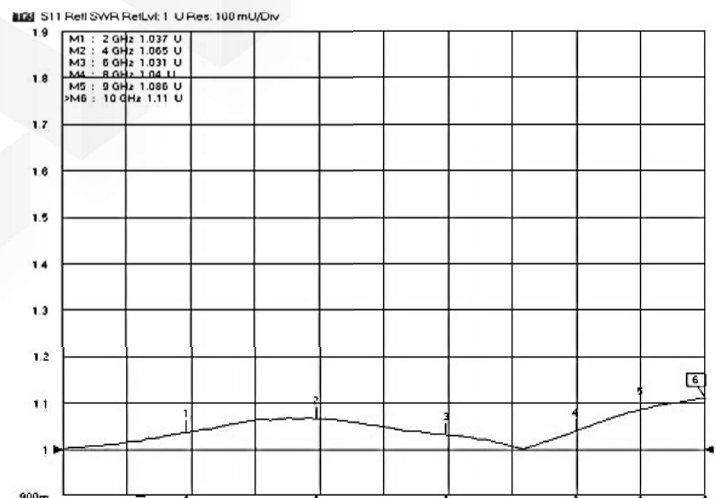

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

