

ELECTRICAL DATA

FREQUENCY : DC-9GHz

IMPEDANCE: 50Ω

VSWR:1.5:1 MAX. (DC-9GHz)

INSERTION LOSS: 1 dB MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 500 Vrms

WORKING VOLTAGE: 170 Vrms MAX.

INSULATION RESISTANCE: 1000Mega Ohms

CENTER CONTACT RESISTANCE: 6.0 mini Ohm

OUTER CONTACT RESISTANCE: 2.5 mini Ohm



MECHANICAL DATA

DURABILITY(MATING/UNMATING):10,000 Cycles

APPLICATION



Fully mating with Hirose U.FL , IPEX MHF.

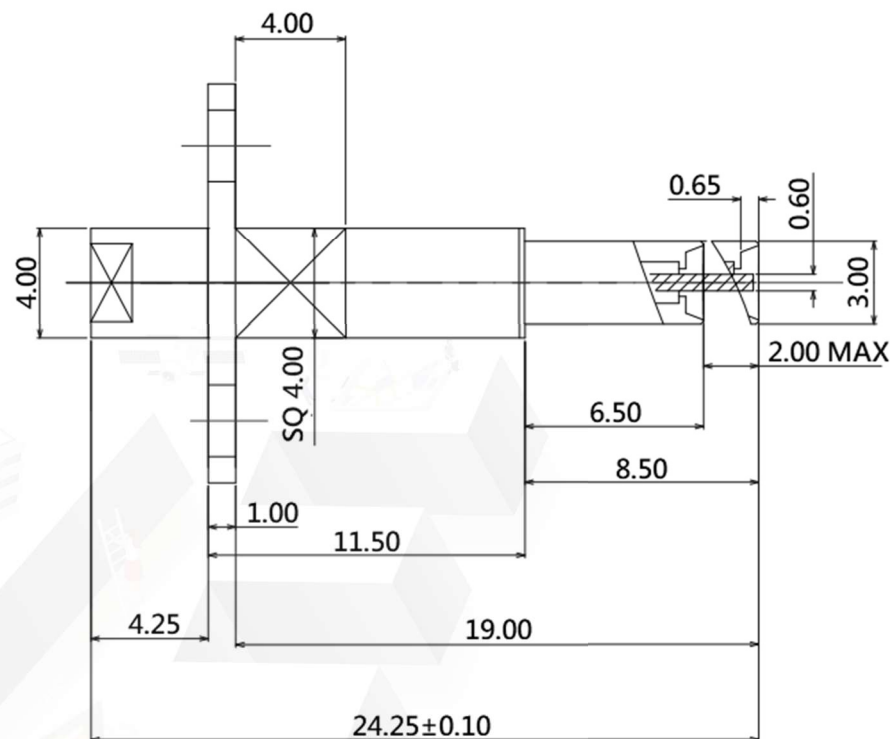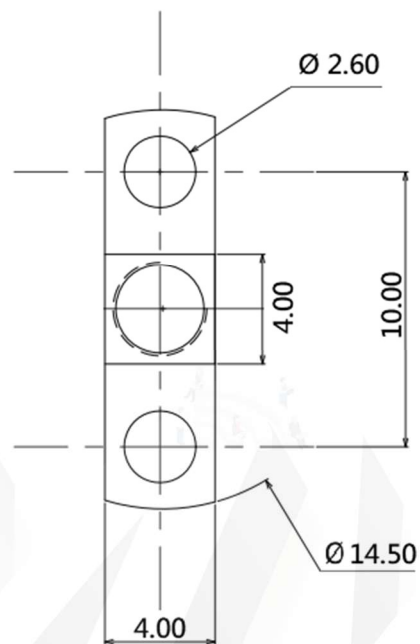

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
SPRING	SUS304	TOLERANCE: X=±0.1	
INSULATOR	TEFLON	TITLE MMCX Female To U.FL Probe Adapter, DC-9GHz	
CENTER	BRASS, GOLD PLATED		
BODY	BRASS, GOLD PLATED		

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





MVE 芝程科技有限公司
Marvelous Microwave Inc.
www.micro-mve.com sales@micro-mve.com +886-2-2602-0660



PART NO.		REV	
MVE1968B		1.3	
SIZE: A	SHEET: 1/1	SCALE:	

Typical Test Result

PART NUMBER	DESCRIPTION
MVE1968B	MMCX Female To U.FL Probe Adapter, DC-9GHz

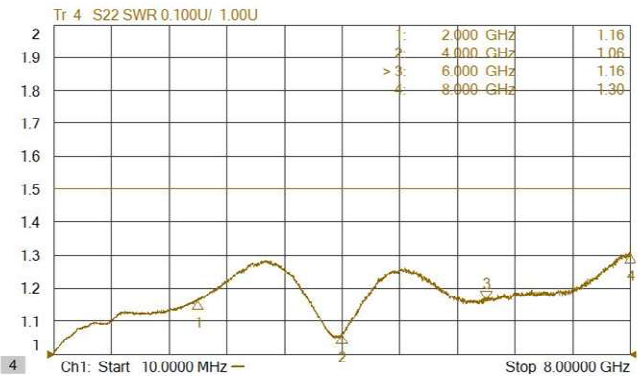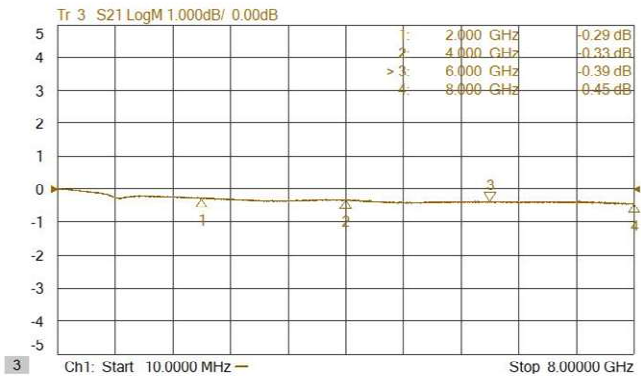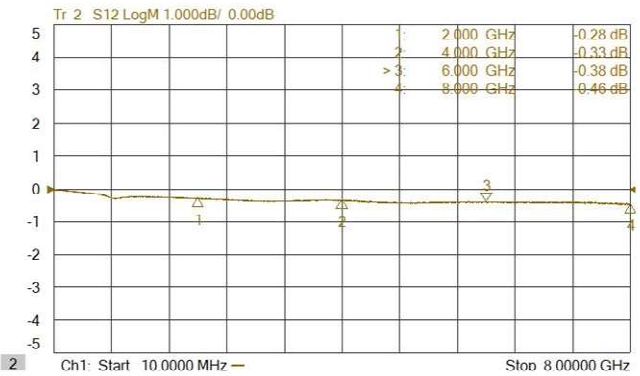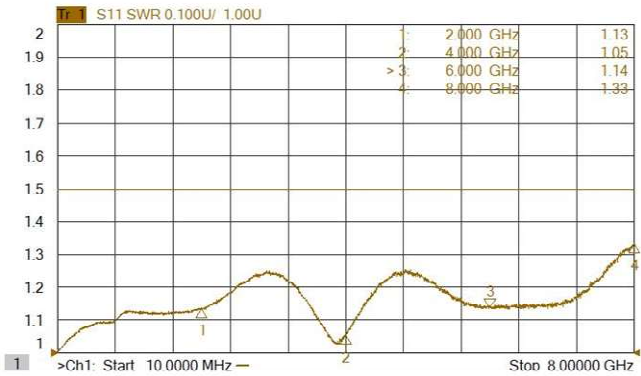

- NOTES
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY