



PCB-SMA TEST PROBE

Features


- ✓ Frequency up to 6 GHz
- ✓ The flexible ground pin can be removed.
- ✓ The same layout as MFH/U.FL



Specifications

PART NUMBER	MVE1970B-GS1	MVE1970B-GS2	MVE1970B-GS3	MVE1970B-GS4
GND PIN	 A-B or D-C	 A-D or B-C (MVE1970-GS2B)	 A-C or B-D	 A-B-C-D
FREQUENCY	DC-6GHz (VSWR 1.35:1 MAX.)			
ELECTRICAL	IMPEDANCE: 50Ω DIELECTRIC WITHSTANDING VOLTAGE: 250 Vrms INSULATION RESISTANCE: 500MΩ MIN. CENCTER CONTACT RESISTANCE: 70 mini-Ohms OUTER CONTACT RESISTANCE: 20mini-Ohms DURABILITY: 10000 CYCLES			
MATERIALS	BODY: BRASS, NICKEL/GOLD INSULATOR: TEFLON/POM CENTER CONTACT: BRASS/Phosphor Bronze/GOLD SHEEL: BRASS/NICKEL SPRING: PIANO WIRE/NICKEL			

Outline Drawing (Unit: mm)

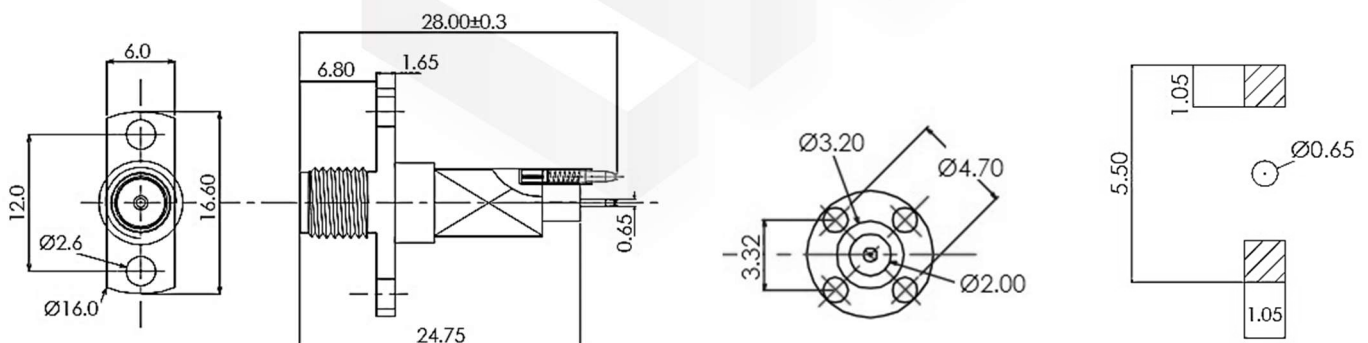

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

