



COAXIAL ADAPTER

SMA-U.FL
Test Probe

Features


- ✓ Frequency up to 8 GHz
- ✓ Low VSWR
- ✓ High Life Cycle



Specifications

PART NUMBER	MVE1997-2T
DESCRIPTION	SMA Female To U.FL Plug(4.2) Adapter, DC-8GHz(ST1)
ELECTRICAL	MATERIALS
FREQUENCY: DC-8GHz IMPEDANCE: 50OHM VSWR: 1.35:1 TYP. DIELECTRIC WITHSTANDING VOLTAGE: 300 Vrms INSULATION RESISTANCE: 500 Mega Ohms	BODY: BRASS & BECU, NICKEL/GOLD PLATED CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED SPRING CONTACT: PIANO WIRE INSULATOR: TEFLON
MECHANICAL DATA	TEMPERATURE
COUPLING METHOD: SNAP ON DURABILITY (MATING/UNMATING): 10000 Cycles Tolerance: X= ±0.38 .X=±0.25 .XX=±0.15	TEMPERATURE RANGE: -40℃ to+ 85℃

Outline Drawing (Unit: mm)

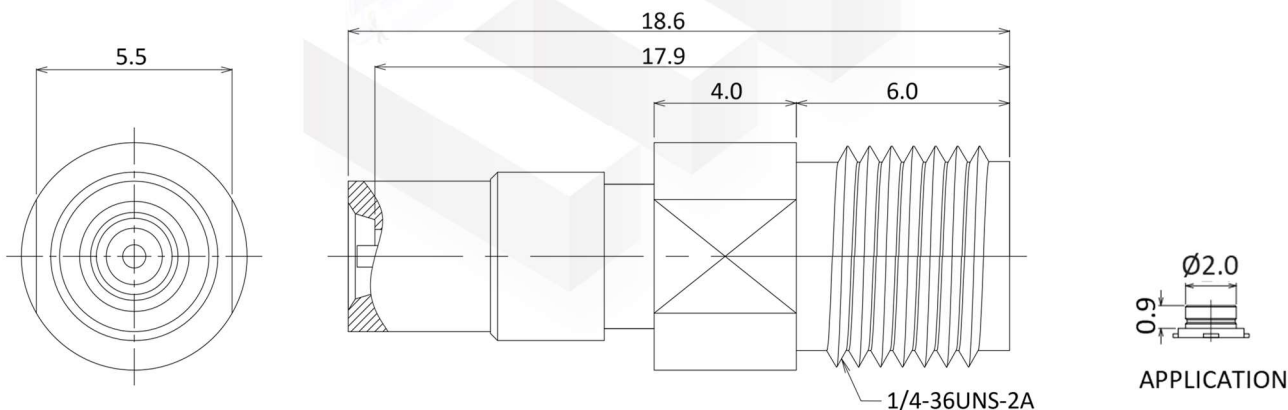

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





Typical Test Result

PART NUMBER	DESCRIPTION
MVE1997-2T	SMA Female To U.FL Plug(4.2) Adapter, DC-8GHz(ST1)

