

ELECTRICAL DATA

FREQUENCY : DC-8GHz

IMPEDANCE: 50Ω

VSWR: 1.3:1 MAX.(DC-3GHz) 1.5:1 MAX.(DC3~8GHz)

INSULATION RESISTANCE: 1000 Mega-Ohms

DIELECTRIC WITHSTANDING VOLTAGE: 500Vrms

MECHANICAL DATA

COUPLING METHOD: FLOATING/SNAP-ON

TEMPERATURE RANGE: -65~165°C





DURABILITY:MMCX- 500 CYCLES MIN.

MM8030- 30K CYCLES MIN.

RECOMMENDED STROKE: 1.8mm(1.2~2mm)

APPLICATION

Fully mating with MM8030

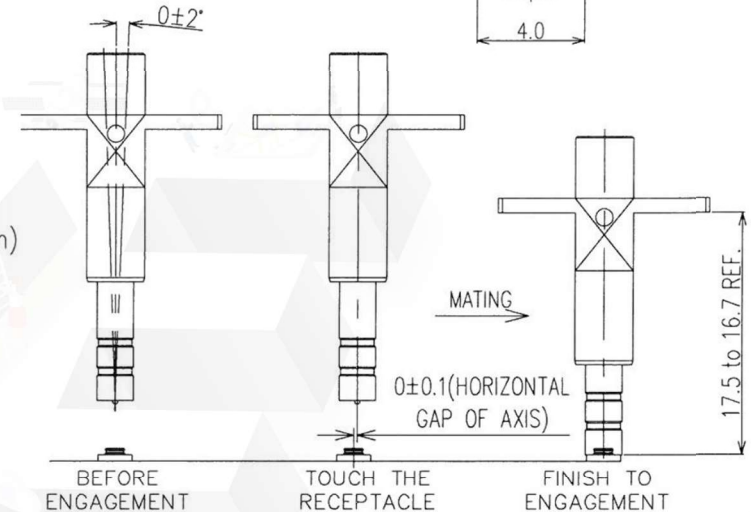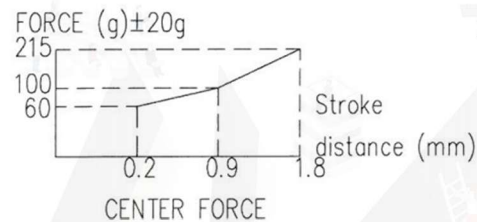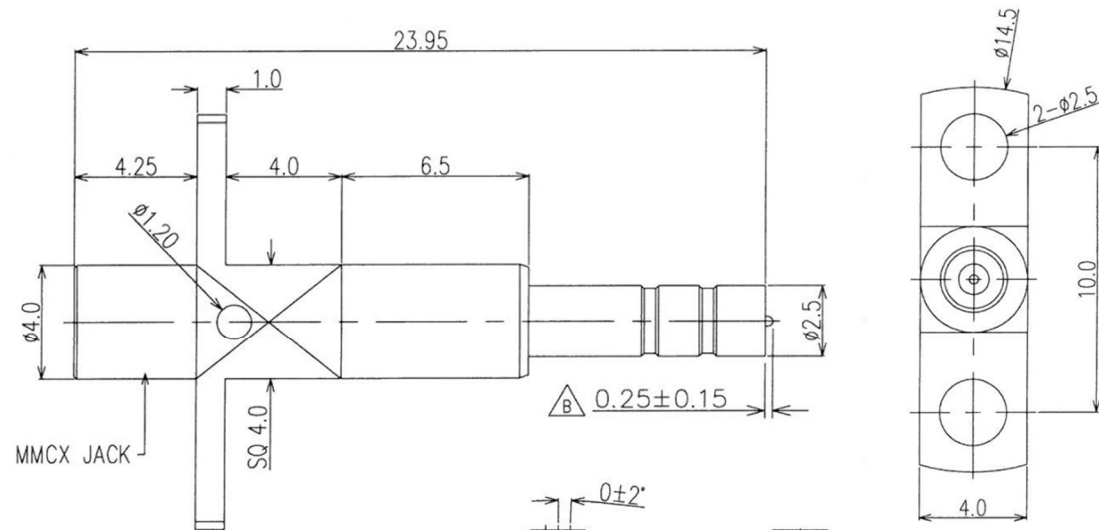

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
BODY	BRASS,GOLD/NICKEL PLATED	TOLERANCE: X=±2.0 X.X=±1.0 X.XX=±0.5	
INSULATOR	TEFLON	TITLE MMCX Female To MM8030 Probe Adapter ,DC-8GHz	
SPRING	SUS304		
POGO PIN	PH-BR/STEEL		

MVE 芝程科技有限公司
Marvelous Microwave Inc.
www.micro-mve.com sales@micro-mve.com +886-2-2602-0660




PART NO. MVE1999-1.35B		REV 2.3
SIZE: A	SHEET: 1/1	SCALE:

NOTES

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

PART NUMBER	DESCRIPTION
MVE1999-1.35B	MMCX Female To MM8030 Probe Adapter ,DC-8GHz

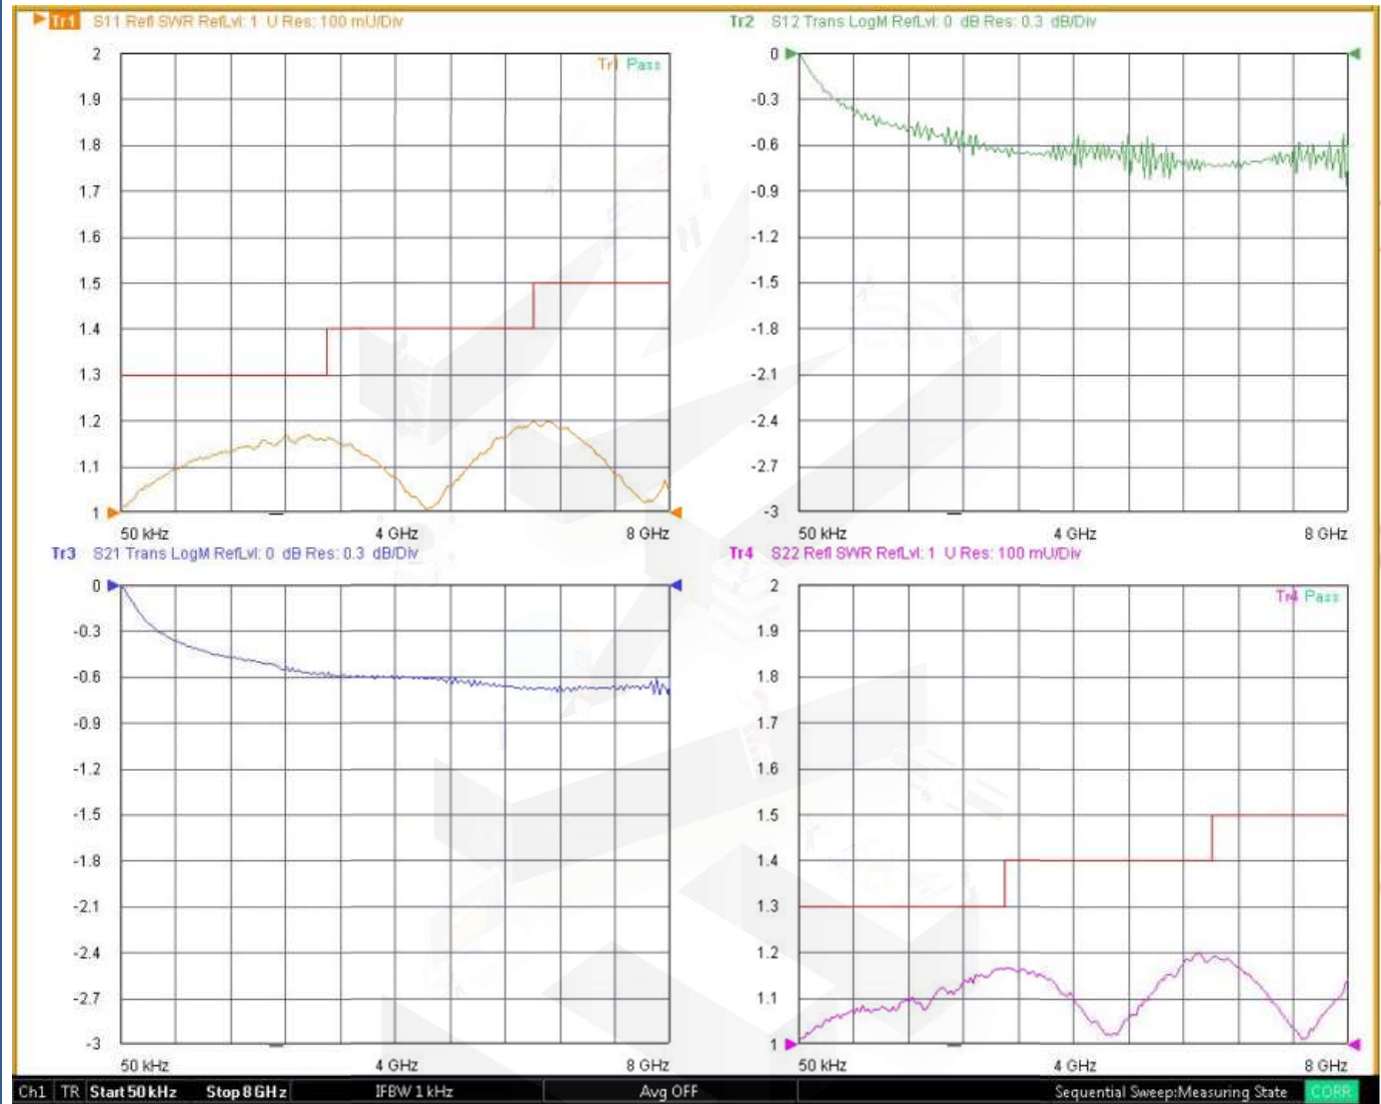

- NOTES**
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY