



FIXED ATTENUATOR MVE2213-XX

DC to 18GHz
2Watts

Features

- ✓ Frequency up to 18GHz
- ✓ High Accuracy
- ✓ Stainless steel



Specifications

PART NUMBER	IMPEDANCE	FREQUENCY	STANDARD VALUE	VSWR (MAX.)	AVERAGE POWER	PEAK POWER	CONNECTOR TYPE
MVE2213-XX	50 Ohms	DC - 18GHz	40-60dB	1.30:1	2Watts @25°C	0.5KW*	SMA

-XX: Insert dB value desired

*5μ sec @0.5% duty cycle

ATTENUATION ACCURACY

40-60dB: ±1.5 dB MAX.

MATERIAL/FINISH


BODY: STAINLESS STEEL, PASSIVATED

ENVIRONMENTAL


TEMPERATURE RANGE: -55°C TO +125°C

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

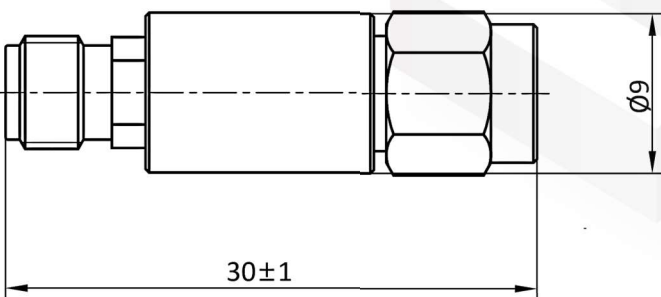

Typical Test Result

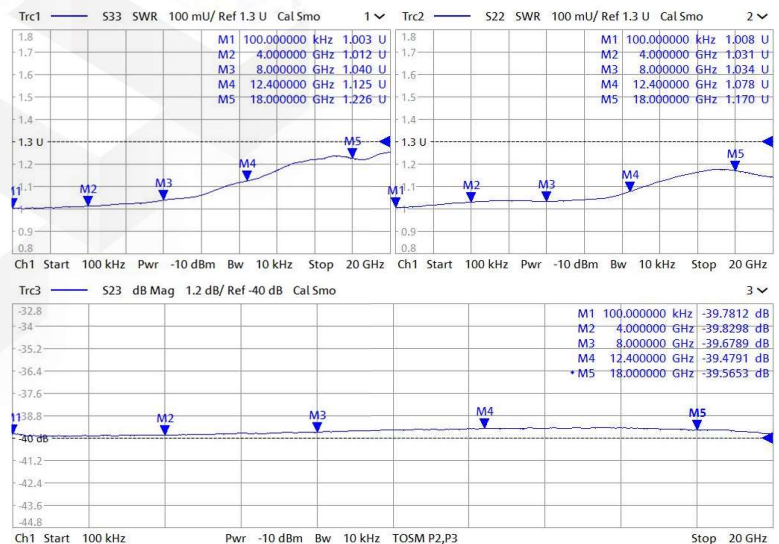

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

