



# COAXIAL CONNECTOR

# SMA DIP FOR PCB TYPE

## Features

- ✓ Frequency up to 12.4GHz
- ✓ Low Insertion Loss
- ✓ High Durability




## Specifications

<b>PART NUMBER</b>	<b>MVE3101-13.5A</b>
<b>DESCRIPTION</b>	SMA Female S/T for PCB Connector, DIP DC-12.4GHz
<b>ELECTRICAL</b>	
FREQUENCY: DC-12.4 GHz IMPEDANCE: 50 Ohm INSERTION LOSS: 1.2dB DURABILITY: 500 Cycles	
<b>MATERIALS</b>	
BODY: BRASS, GOLD PLATED CONTACT: BRASS, GOLD PLATED INSULATOR: TEFLON	

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

## Outline Drawing (Unit: mm)

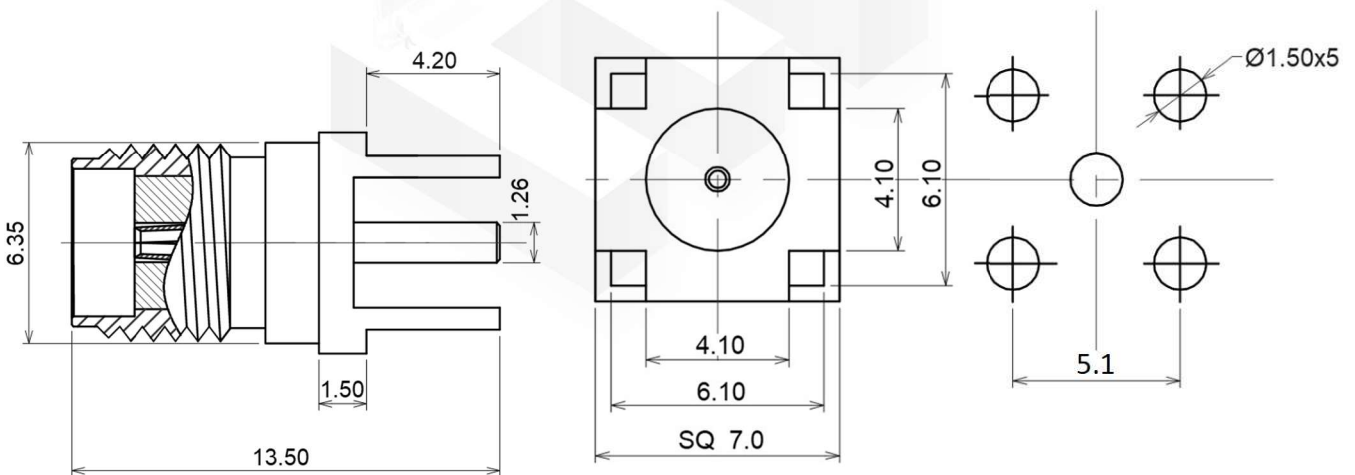

**NOTES:**

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

