



ELECTRICAL DATA

FREQUENCY: DC-6GHz
IMPEDANCE: 50Ω
VSWR: 1.50:1@DC-6GHz
INSULATION RESISTANCE: 1000Mega-ohms
DIELECTRIC WITHSTANDING: 500Vrms
CENTER CONTACT RESISTANCE: 8.0 Mini-Ohms
OUTER CONTACT RESISTANCE: 6.0 Mini-Ohms

MECHANICAL DATA

COUPLING METHED: SNAP-ON
DURABILITY(MATING/UNMATING): 8K CYCLES

ROHS COMPLIANCE

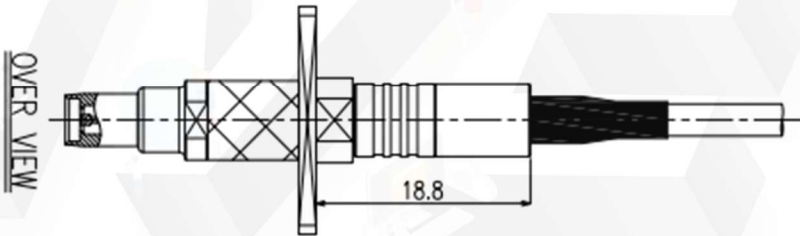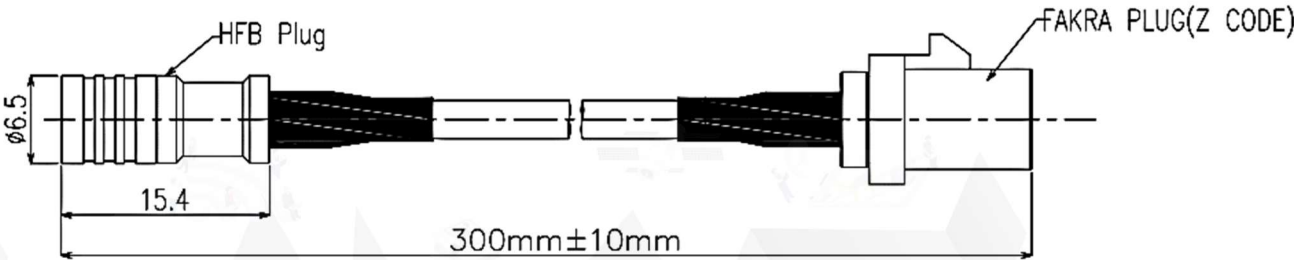

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
BODY	BRASS ,NICKEL/GOLD PLATED	TOLERANCE: X=±0.38 X.X=±0.25 X.XX=±0.15	
CONTACT PIN	BRASS, GOLD PLATED	TITLE HFB Plug to FAKRA PLUG(Z CODE), DC-6GHz,Flexible 085 Blue / L:30cm / VSWR<1.5	
INSULATOR	TEFLON		



芝程科技有限公司
Marvelous Microwave Inc.
www.micro-mve.com sales@micro-mve.com +886-2-2602-0660



PART NO.		MAC79Z820.F085.30		REV
				1.1
SIZE: A	SHEET: 1/1		SCALE:	

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY