



COAXIAL ADAPTER

SMA-SMA Standard Series

Features

- ✓ High performance design
- ✓ Frequency Range DC to 10GHz
- ✓ Low VSWR




Specifications

PART NUMBER	MVE1712C
DESCRIPTION	SMA Male To SMA Female R/A Adapter, DC-10GHz
ELECTRICAL	MATERIALS
FREQUENCY : DC-10GHz IMPEDANCE: 50Ω DIELECTRIC WITHSTANDING VOLTAGE: 1000V rms MAX. INSULATOR RESISTANCE: 5000MΩ MIN. VSWR: 1.25:1 TEMPERATURE RANGE: -45°C~+125°C	BODY: BRASS, GOLD PLATED OUTER CONDUCTOR: BRASS, GOLD PLATED INNER CONDUCTOR: PHOSPHOR COPPER, GOLD PLATED INSULATOR: PTFE

Tolerance: ±0.2mm

Outline Drawing (Unit: mm)

Typical Test Result

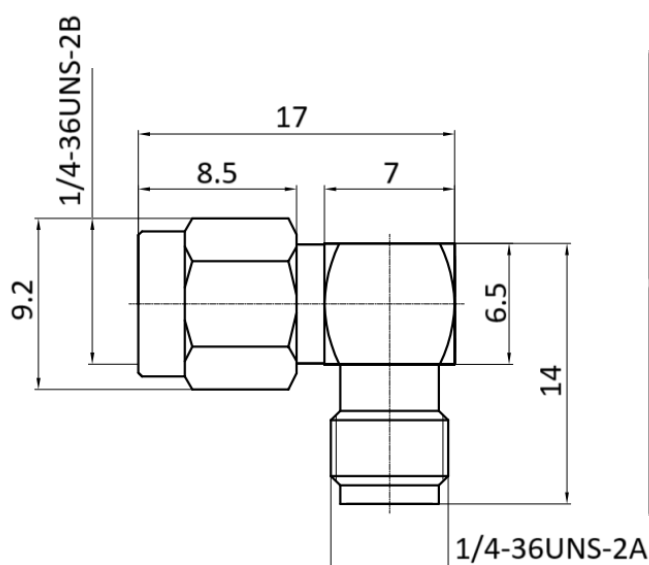

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

