



# COAXIAL CONNECTOR

## SMA MALE For PCB Connector

### Features

- ✓ Frequency up to 12.4 GHz
- ✓ High Durability
- ✓ High performance design




### Specifications

<b>PART NUMBER</b>	<b>MVE3119-16.8</b>
<b>DESCRIPTION</b>	SMA Male S/T For PCB Connector, DIP DC-12.4GHz
<b>ELECTRICAL</b>	
FREQUENCY: DC-12.4GHz IMPEDANCE: 50 ohm WORKING VOLTAGE: 500Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. INSULATOR RESISTANCE: 5000 MEGOHMS MIN.	
<b>MATERIALS</b>	
BODY: BRASS, GOLD PLATED CONTACT: BRASS, GOLD PLATED INSULATOR: PTFE SHELL: BRASS, GOLD PLATED C-RING: BE COPPER GASKET: SILICON	

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

### Outline Drawing (Unit: mm)

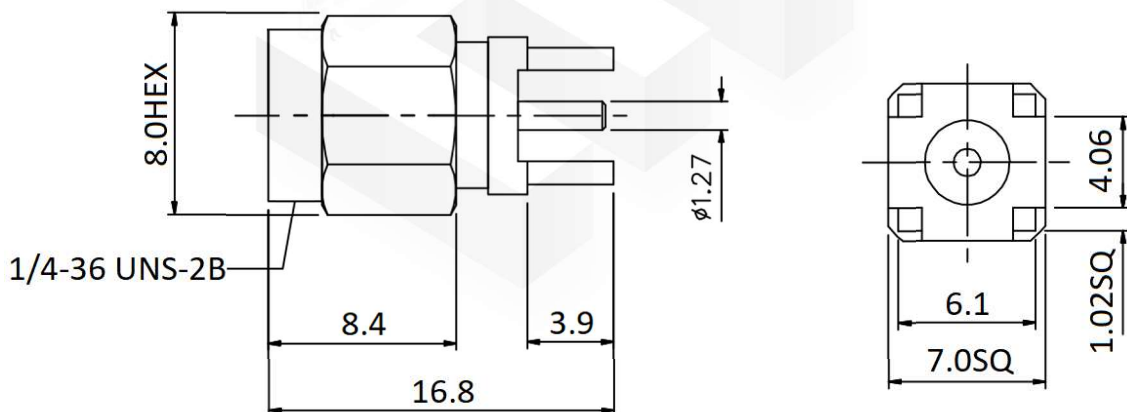

NOTES:  
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

