


## ELECTRICAL DATA

FREQUENCY : DC-6GHz  
 IMPEDANCE: 50Ω  
 INSULATION RESISTANCE:  $\geq 5000 \text{ M}\Omega$   
 WITHSTANDING VOLTAGE: 1000 V

## MECHANICAL

TEMPERATURE RANGE: -55°C~+165°C  
 DURABILITY: >500

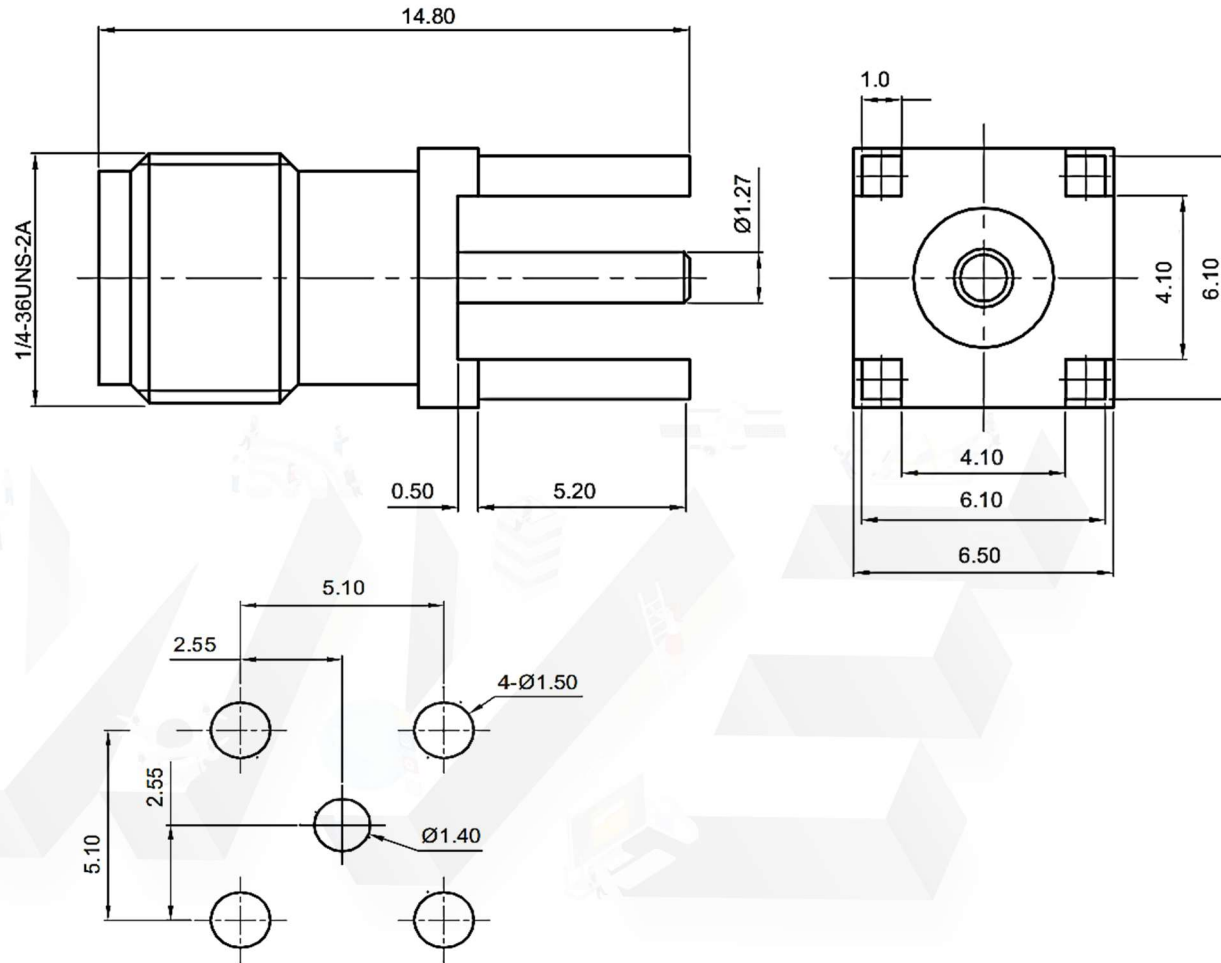

Recommended Mounting Hole

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
BODY	BRASS,GOLD PLATED	TOLERANCE: X=±0.5 X.X=±0.2	
CONTACT PIN	BERYLLIUM COPPER ALLOY,GOLD PLATED	TITLE SMA Female S/T For PCB Connector, DIP DC-6GHz	
INSULATOR	PTFE		


**芝程科技有限公司**  
 Marvelous Microwave Inc.  
 www.micro-mve.com sales@micro-mve.com +886-2-2602-0660



---

PART NO.	<b>MVE3133-14.8</b>	REV	<b>1.2</b>
SIZE: A	SHEET: 1/1	SCALE:	

### NOTES

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY