



COAXIAL CONNECTOR

SMA END LAUNCH FOR PCB TYPE

Features

- ✓ Frequency up to 6GHz
- ✓ Low VSWR
- ✓ High performance design




Specifications

PART NUMBER	MVE3701-1.0
DESCRIPTION	SMA Female S/T End Launch For PCB Connector/1.0mm, DC-6GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-6GHz IMPEDANCE: 50 OHM WORKING VOLTAGE: 500Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. INSULATOR RESISTANCE: 5000 MEGOHMS MIN.	BODY: BRASS, GOLD PLATED CONTACT: BE COPPER, GOLD PLATED 30 INSULATOR: TEFLON

TOLERANCE: X=±0.50 X.X=±0.20 X.XX=±0.10

Outline Drawing (Unit: mm)

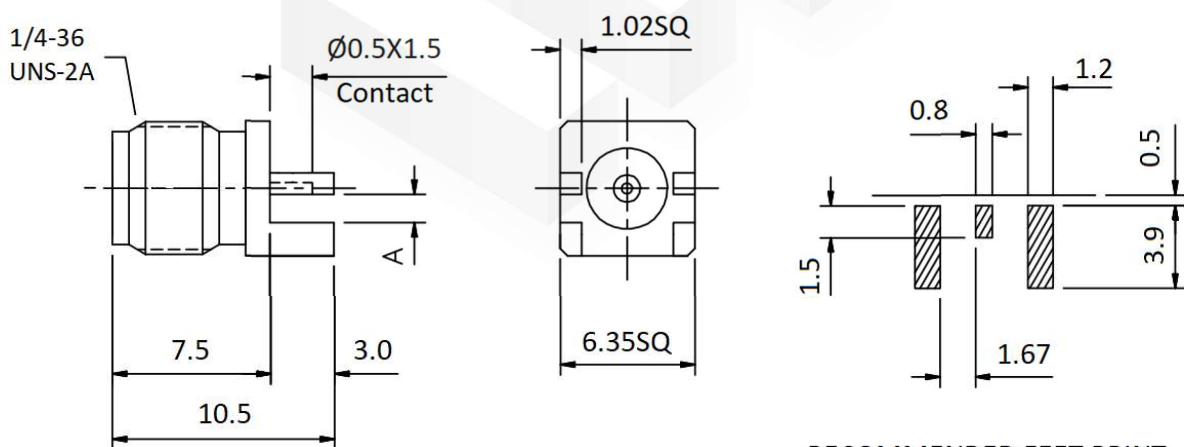

RECOMMENDED FEET PRINT

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

