



COAXIAL CONNECTOR

SMA END LAUNCH
 FOR PCB TYPE

Features

- ✓ Frequency Range: DC to 6 GHz
- ✓ High performance design
- ✓ High interface performance




Specifications

PART NUMBER	MVE3701-1.73
DESCRIPTION	SMA Female S/T End Launch For PCB Connector/1.73mm, DC-6GHz
ELECTRICAL FREQUENCY: DC-6GHz IMPEDANCE: 50 OHM WORKING VOLTAGE: 500Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. INSULATOR RESISTANCE: 5000 MEGOHMS MIN.	
MATERIALS BODY: BRASS, GOLD PLATED CONTACT: BE COPPER, GOLD PLATED INSULATOR: TEFLON	

TOLERANCE: X=±0.50 X.X=±0.20 X.XX=±0.10

Outline Drawing (Unit: mm)

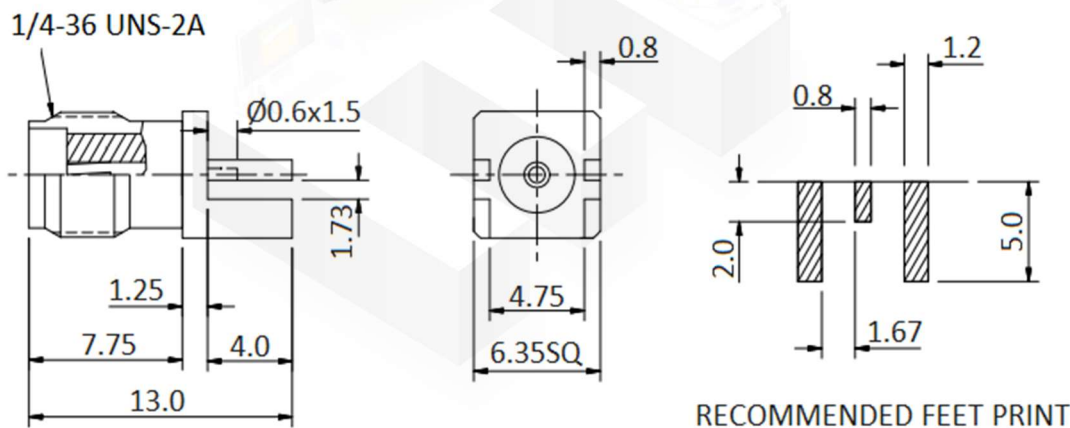

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

