



DIRECTIONAL COUPLER

0.5-6GHz
SMA Series

Features

- ✓ Full Frequency Bandwidth
- ✓ High Directivity
- ✓ Low VSWR




Specifications

FREQUENCY RANGE: 0.5-6 GHz
CONNECTOR TYPE: SMA FEMALE
TEMPERATURE RANGE: -40°C TO +80°C

PART NUMBER	NOMINAL COUPLING	COUPLING SENSITIVITY	COUPLING LOSS	INSERTION LOSS	DIRECTIVITY	VSWR	FORWARD POWER
MVE4515-10	10±1dB	≤±0.7dB	0.45dB	≤0.7dB	≥18dB	1.20:1	50W

Tolerance:±0.5mm

Outline Drawing (Unit: mm)

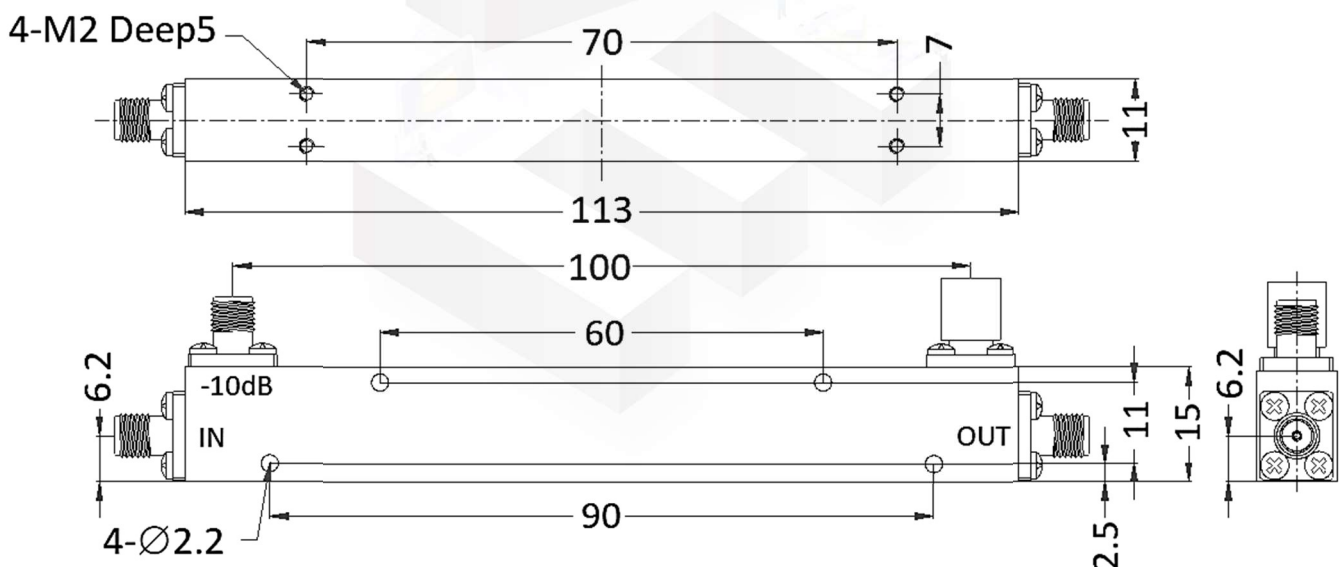

NOTES:


1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





Typical Test Report


Insertion Loss

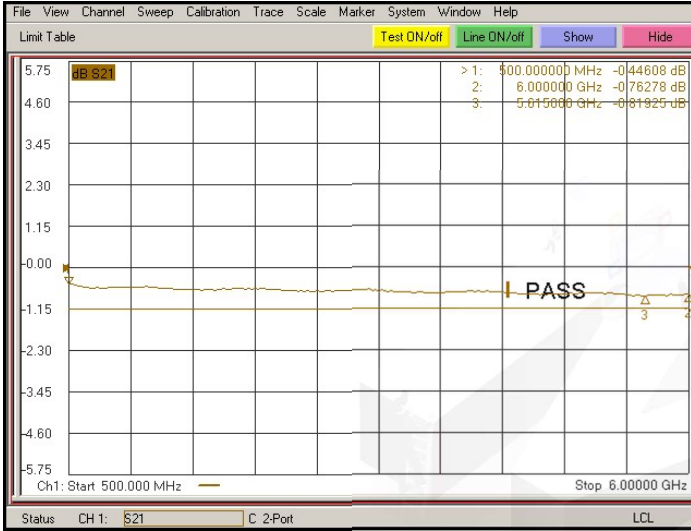

Coupling Flatness VSWR



Directivity

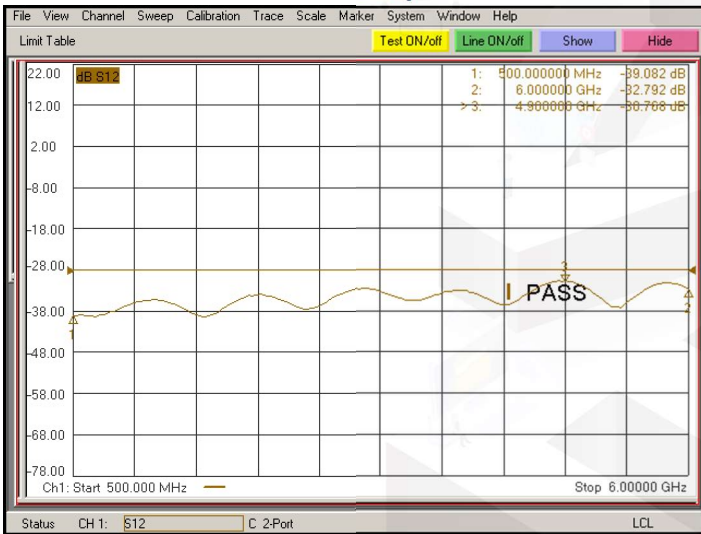

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

