



# DIRECTIONAL COUPLER

**SMA Series**  
**0.5-26.5GHz**

## Features

- ✓ Operating frequency range from 0.5-26.5GHz
- ✓ Full Frequency Bandwidth
- ✓ High Directivity

## Specifications

**FREQUENCY RANGE: 0.5-26.5GHz**


**CONNECTOR TYPE: SMA FEMALE**

**OPERATION TEMPERATURE RANGE:-45°C~+85°C**

PART NUMBER	FREQUENCY (GHz)	COUPLING VALUE	INSERTION LOSS	DIRECTIVITY	VSWR	POWER AVERAGE
MVE4861-13	0.5-26.5	13.0±1.0 dB	≤2.1dB	≥ 10dB	≤ 1.60	20Watts

Tolerance: ±0.5mm

## Outline Drawing (Unit: mm)

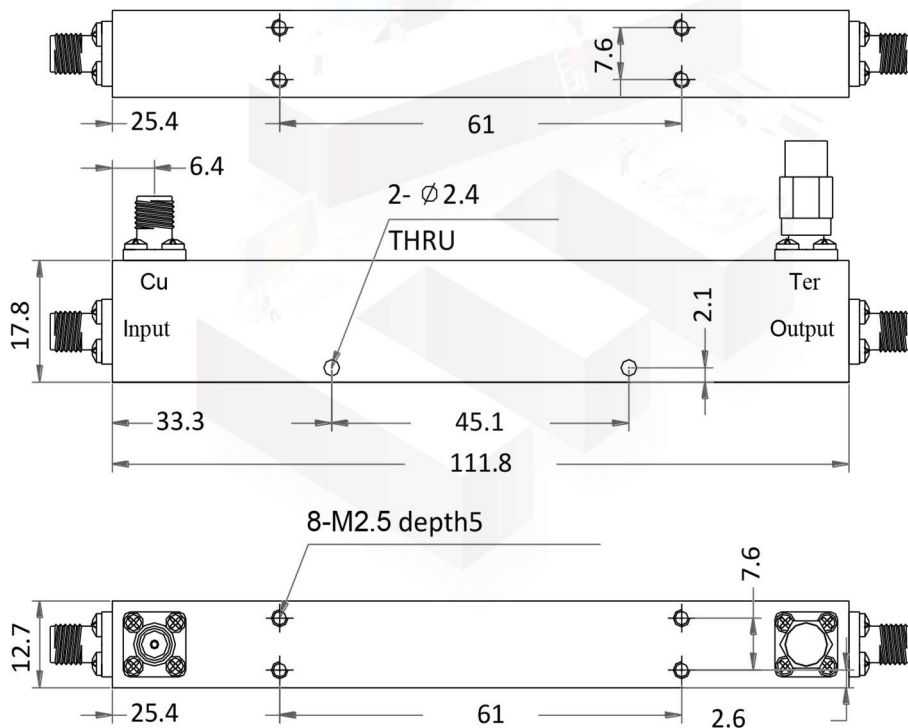

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

