



DIRECTIONAL COUPLER

Precision Series
2-50GHz 2.4mm

Features

- ✓ Operating Frequency From 2GHz to 50GHz
- ✓ Low VSWR
- ✓ Low Insertion Loss

Specifications

Frequency Range: 2-50GHz


Connector Type: 2.4mm Female

Operational Temperature: -45°C~+85°C

PART NUMBER	Nominal Coupling	FREQUENCY SENSITIVITY	INSERTION LOSS (MAX.)	DIRECTIVITY (MIN.)	VSWR		POWER HANDLING (TYP.)
					MAX.	TYP.	
MVE4915-10	10.5±1.2dB	±1.5dB	6dB	10 dB	1.80:1	1.60:1	10W

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

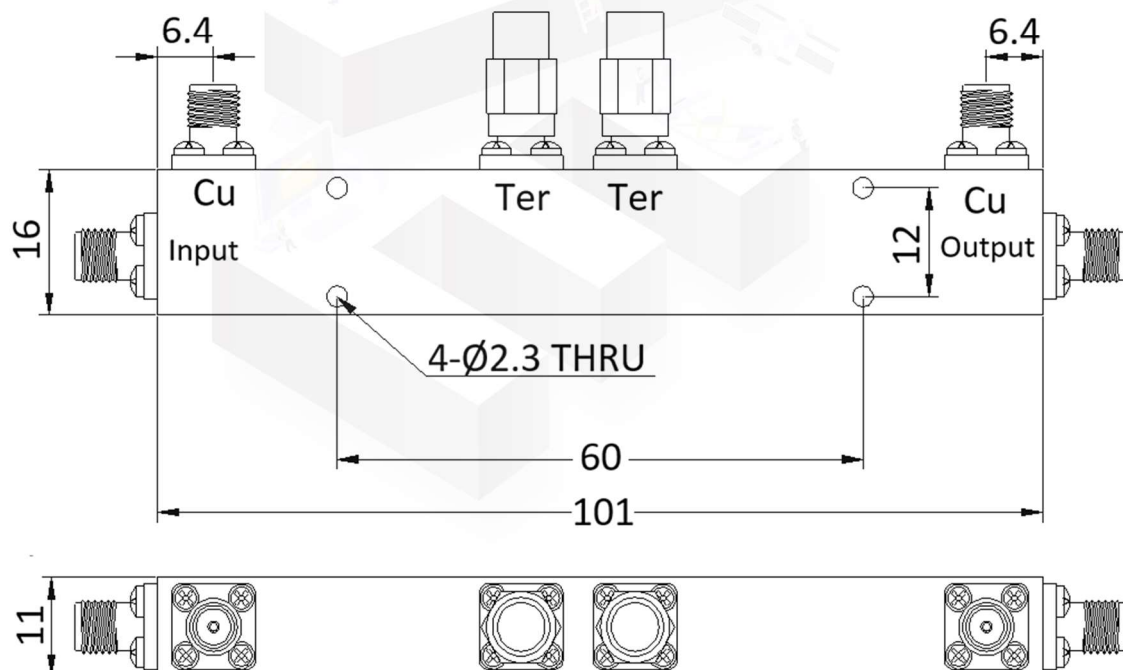

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

