



DUAL DIRECTIONAL COUPLER

1-6GHz
N Series

Features

- ✓ Frequency Range: 1-6GHz
- ✓ High Directional
- ✓ Low Insertion loss
- ✓ Low VSWR




Specifications

FREQUENCY RANGE: 1-6 GHz
CONNECTOR TYPE: N FEMALE
TEMPERATURE RANGE: -45°C TO +85°C


PART NUMBER	NOMINAL COUPLING	FREQUENCY SENSITIVITY	INSERTION LOSS MAX.	DIRECTIVITY MIN.	VSWR MAX.	Average power
MVE4928-40	40±1.0 dB	±1.0 dB	0.4dB	12 dB	1.5:1	300W

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

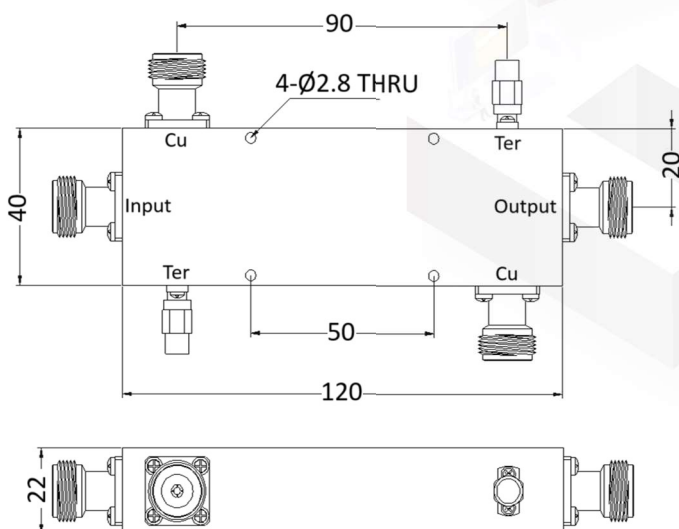

Typical Test Result

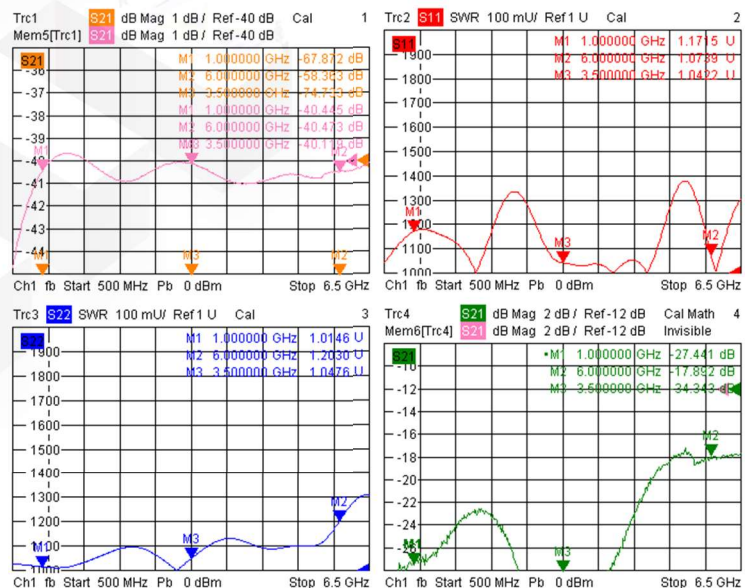

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

