



TERMINATION

SMA Female Precision Series

Features

- ✓ Frequency up to 18GHz
- ✓ Low VSWR
- ✓ High Durability




Specifications


PART NUMBER	MVE5180
DESCRIPTION	SMA Female Termination, 1W DC-18GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-18GHz IMPEDANCE: 50ohm VSWR: 1.15:1 MAX. AVERAGE POWER: 1WATT AVG. TEMPERATURE RANGE: -55°C TO +125°C DURABILITY: 500CYCLE MIN.	BODY: STAINLESS STEEL, PASSIVATED CENTER CONTACT: BERYLLIUM COPPER ALLOY CONTACT PLATING: GOLD PLATED

Tolerance: X=±0.5 X.X=±0.2 X.XX=±0.13

Outline Drawing (Unit: mm)

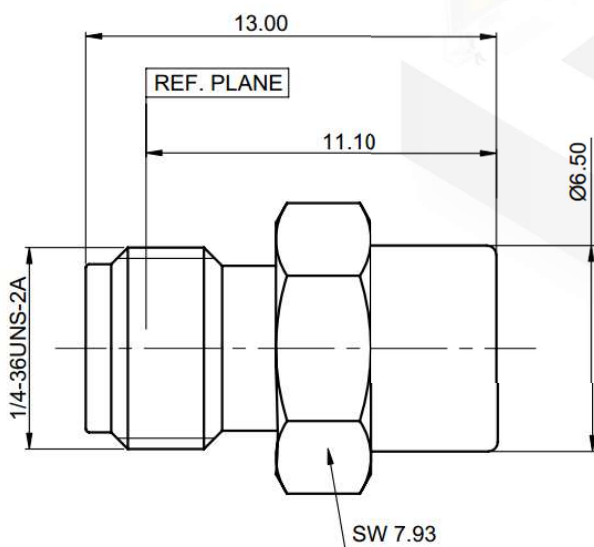

Typical Test Result

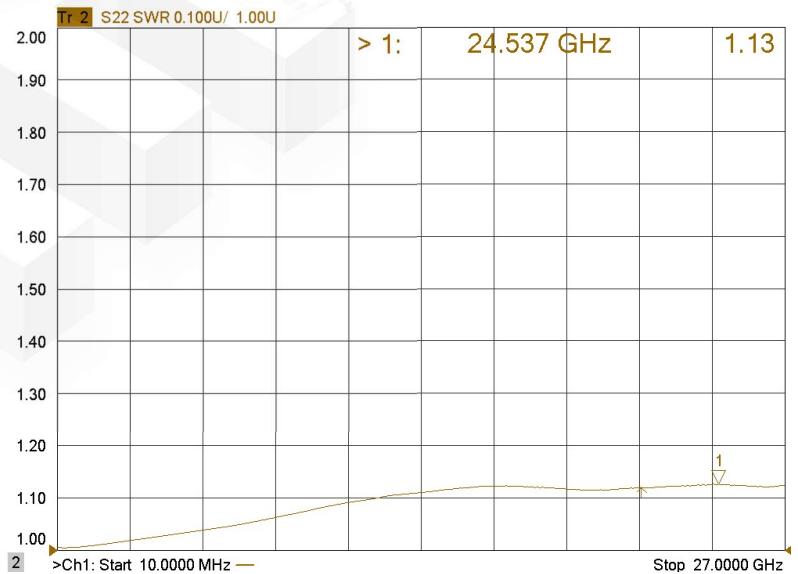

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

