



TERMINATION

SMA Series

Features

- ✓ Frequency up to 20 GHz
- ✓ Low VSWR
- ✓ Delivery From Stock




Specifications


PART NUMBER	MVE5183-S
DESCRIPTION	SMA MALE 1W TERMINATION, DC-20GHz
ELECTRICAL	
FREQUENCY : DC-20GHz IMPEDANCE: 50OHM VSWR: 1.20:1 MAX(DC~20GHz) INPUT POWER: 1WATT AVG. TEMPERATURE RANGE: -30°C TO +60°C	
MATERIALS	
BODY: BRASS, GOLD PLATED CENTER CONTACT: BRASS, GOLD PLATED INSULATOR: PTFE TEFLON COUPLING NUT: BRASS,NICKEL PLATED GASKET: SILICONE RUBBER	

Tolerance: X= ±0.2

Outline Drawing: (Unit: mm)

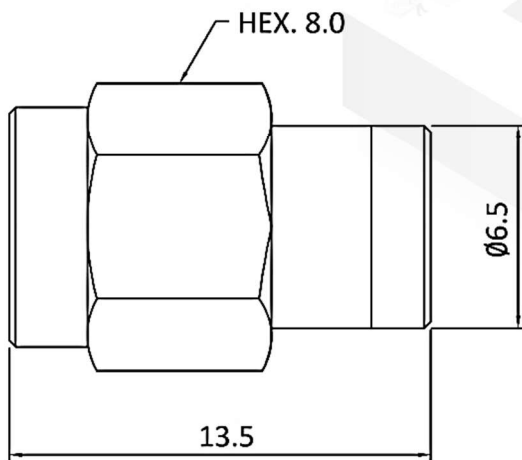

Typical Test Result

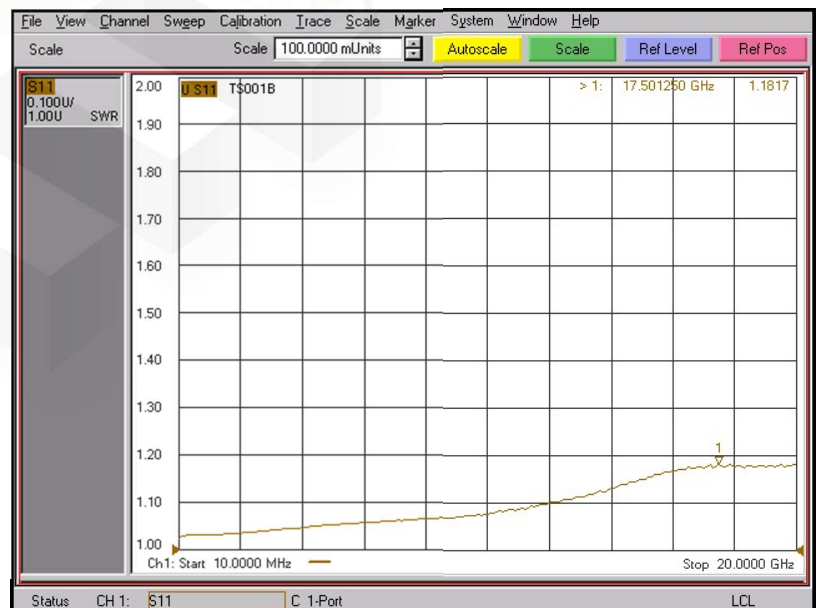

- NOTES
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

