



TERMINATION

SMA Male
2Watts

Features

- ✓ Frequency up to 20GHz
- ✓ Low VSWR




Specifications

TEMPERATURE RANGE: -40°C TO +85°C


PART NUMBER	MVE5185
DESCRIPTION	SMA MALE 2W TERMINATION, DC-20GHz
ELECTRICAL	
FREQUENCY: DC-20GHz IMPEDANCE: 50Ohm VSWR: 1.20:1 MAX(DC~20GHz) INPUT POWER: 2WATT AVG.	
MATERIALS	
BODY: BRASS, GOLD PLATED CENTER CONTACT: BRASS, GOLD PLATED INSULATOR: PTFE TEFLON COUPLING NUT: BRASS, NICKEL PLATED	

Tolerance: ±0.2mm

Outline Drawing (Unit: mm)

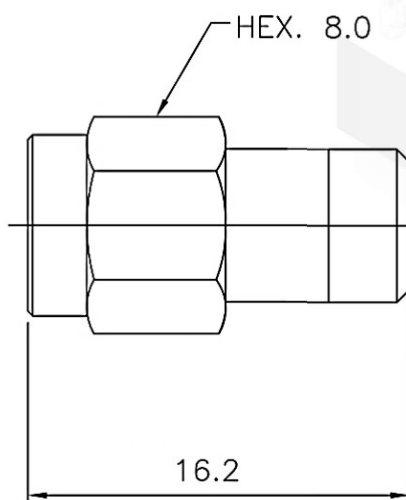

Typical Test Result

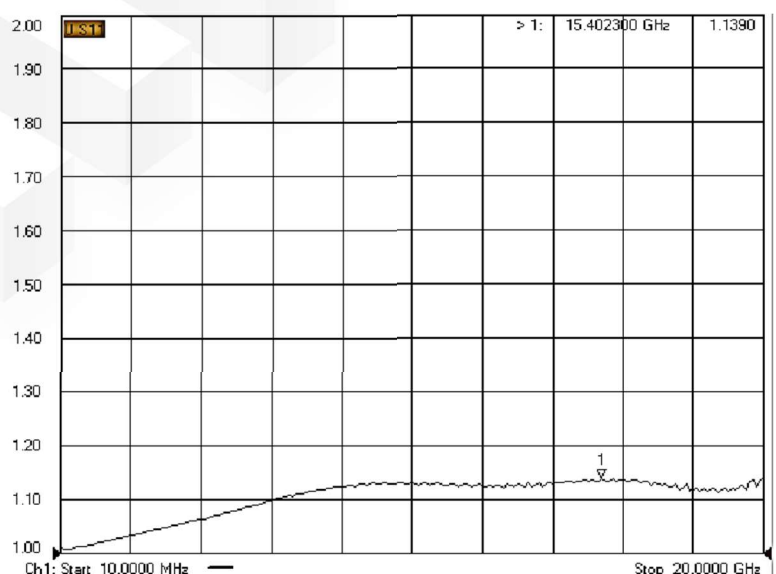

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

