



TERMINATION

2.4mm Male
1WATT

Features

- ✓ Frequency up to 50GHz
- ✓ Low VSWR
- ✓ High performance design




Specifications


PART NUMBER	MVE5190
DESCRIPTION	2.4mm Male Termination, 1W DC-50GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-50GHz IMPEDANCE: 50OHM VSWR: 1.25:1 MAX. (DC-40GHz); 1.30:1 MAX. (50GHz) AVERAGE POWER: 1W AVG. TEMPERATURE RANGE: -55°C TO +125°C DURABILITY: 500 MIN.	BODY: STAINLESS STEEL, PASSIVATED CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED COUPLING NUT: STAINLESS STEEL, PASSIVATED

Tolerance: $\pm 0.5\text{mm}$

Outline Drawing (Unit: mm)

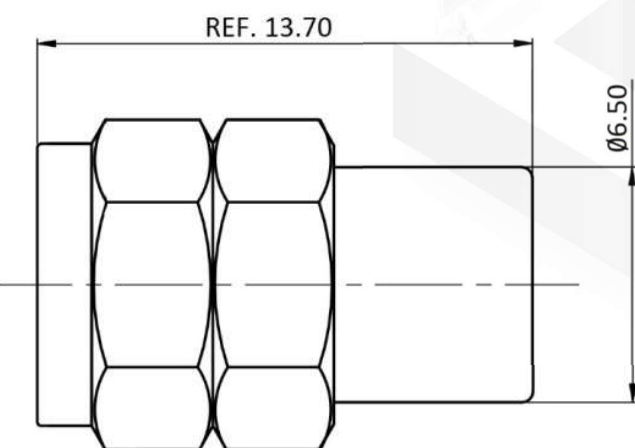

Typical Test Result

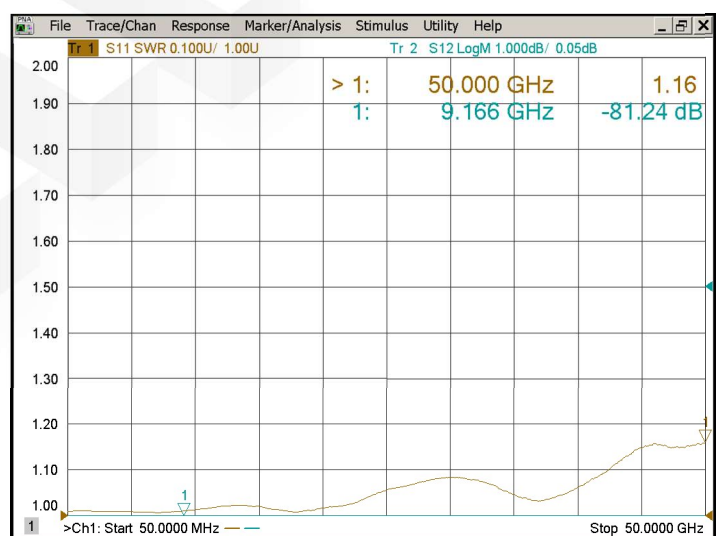

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

