



TERMINATION

1.0mm
1 WATT

Features

- ✓ Frequency up to 110GHz
- ✓ Low VSWR
- ✓ High performance design




Specifications:


PART NUMBER	MVE5206
DESCRIPTION	1.0mm Male Termination, 1W DC-110GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-110GHz IMPEDANCE: 50Ohm VSWR: 1.5:1 MAX. AVERAGE POWER: 1WATT @25°C (DERATED LINEARLY TO 0.1W @ 125°C) PEAK POWER: 5WATT (MAX. 5μs PULSE WIDTH WITH MAX. 1% DUTY CYCLE) OPERATING TEMP: -55°C ~+125°C	BODY: STAINLESS STEEL, PASSIVATED PIN CONTACT: BRASS, GOLD PLATED INSULATOR: PEI

Tolerance: ±5%

Outline Drawing (Unit: mm)

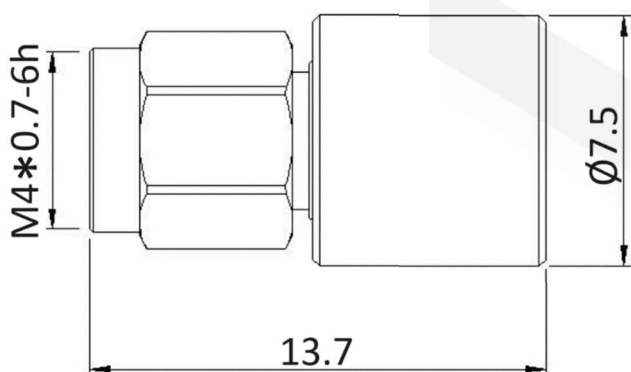

Typical Test Result

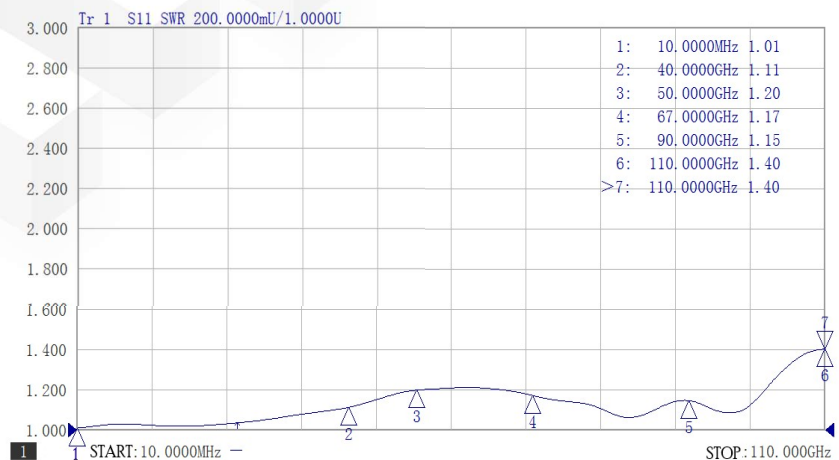

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

