



DC BLOCK

N Series 0.01-6GHz

Features

- ✓ Frequency Range: 10MHz to 6GHz
- ✓ Low VSWR
- ✓ Low Insertion Loss




Specifications


PART NUMBER	MVE6150
DESCRIPTION	N Male to Female In/out 50V DC Block, 2W 0.01-6GHz
ELECTRICAL	
FREQUENCY: 0.01-6GHz IMPEDANCE: 50ohm INSERTION LOSS: 0.3 dB MAX. VSWR: 1.25:1 MAX. DC VOLTAGE: 50V TEMPERATURE: -55°C~100°C	
MATERIALS	
BODY: BRASS, GOLD PLATED CONNECTORS: BRASS, TERNARY ALLOY PLATED	

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

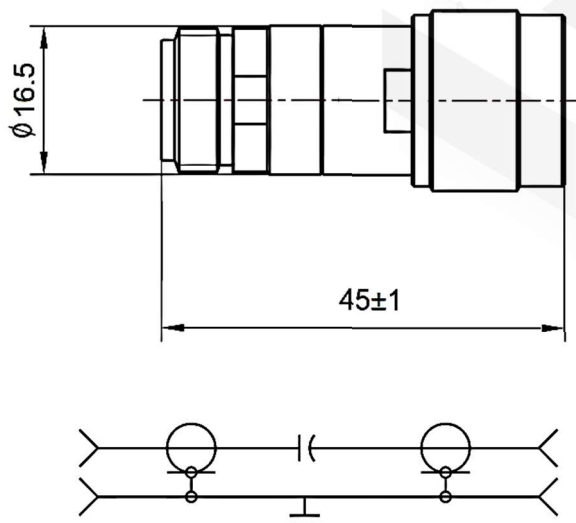

Typical Test Report

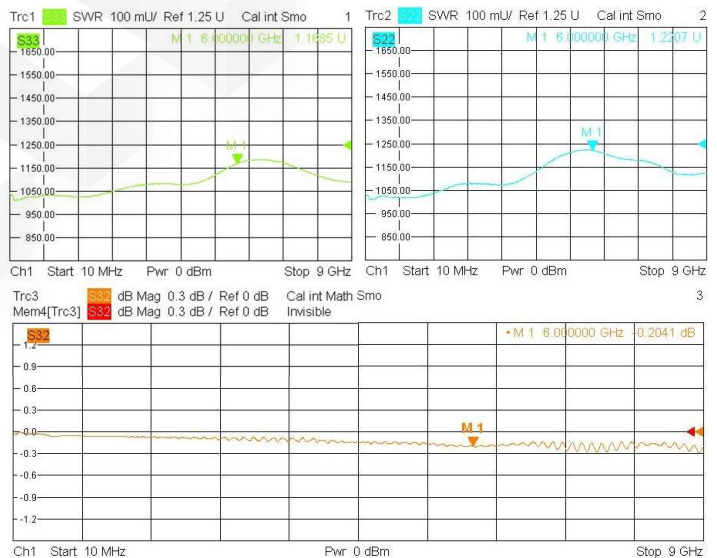

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

