



DC BLOCK

Inner Design 2.4mm 0.01-50GHz

Features

- ✓ Frequency up to 50GHz
- ✓ Low VSWR, Excellent Insertion loss
- ✓ Rugged construction




Specifications


PART NUMBER	MVE6184H
DESCRIPTION	2.4mm Male to Female Inner 50V DC Block, 0.01-50GHz
ELECTRICAL	MATERIALS
FREQUENCY: 0.01-50GHz IMPEDANCE: 50 OHM INSERTION LOSS: 1.0 dB MAX. VSWR: 1.45:1MAX. OPERATING VOLTAGE (DC): 50Volts OPERATING TEMPERATURE: -55°C to +85 °C	HOUSING: STAINLESS STEEL CONNECTORS: STAINLESS STEEL MALE PIN: BRASS,GOLD PLATED FEMALE PIN: BERYLLIUM COPPER,GOLD PLATED

Tolerance: X= ±5%

Outline Drawing (Unit: mm)

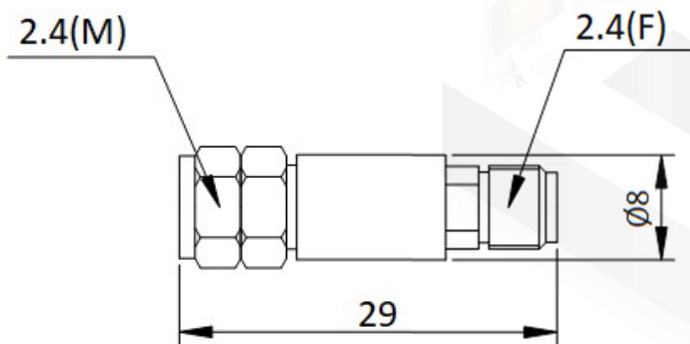

Typical Test Result

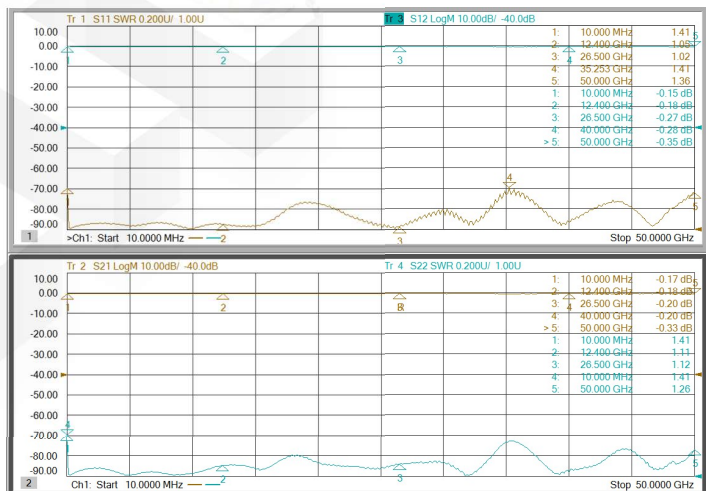

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

