



DC BLOCK

1.85mm Series
0.01-67GHz

Features

- ✓ Frequency Range: 0.01 to 67GHz
- ✓ 50V Protect DC Block
- ✓ Low VSWR & Insertion Loss




Specifications


PART NUMBER	MVE6190
DESCRIPTION	1.85mm Male to Female 50V Inner DC Block, 0.01-67GHz
ELECTRICAL	MATERIALS
FREQUENCY: 0.01-67GHz IMPEDANCE: 50 Ohm INSERTION LOSS: 0.9dB MAX. VSWR: 1.50:1MAX. DC VOLTAGE: 50V MAX. TEMPERATURE RANGE: -55°C~+ 100°C	CONNECTOR: STAINLESS STEEL, PASSIVATED MALE PIN: BRASS, GOLD PLATED FEMALE PIN: BERYLLIUM BRONZE, GOLD PLATED INSULATORS: PEI

Tolerance: ±0.5%

Outline Drawing (Unit: mm)

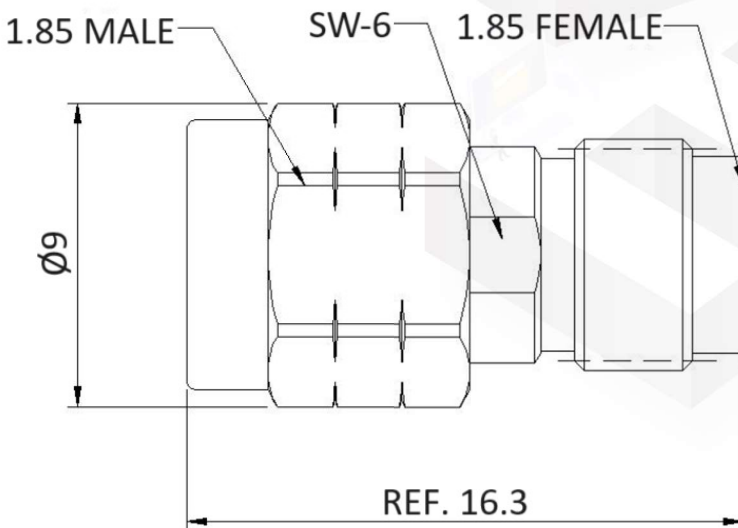

Typical Test Result

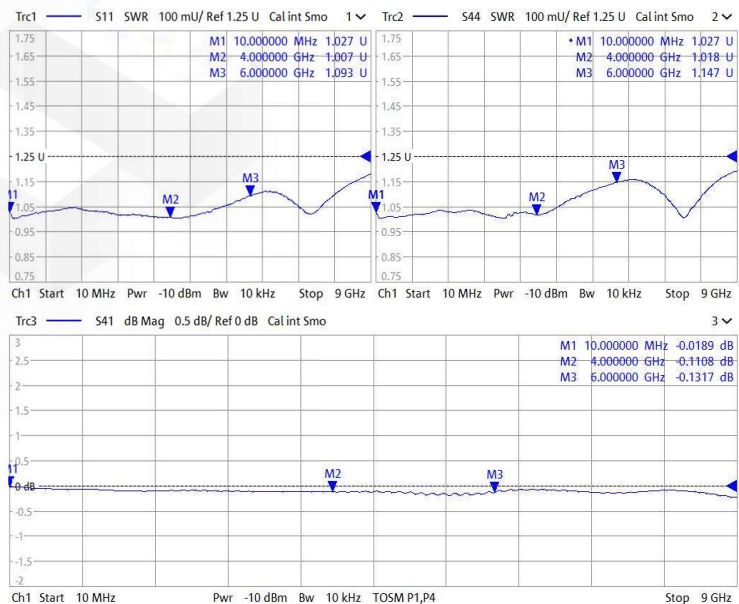

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

