



DC BLOCK

2.92mm Series 0.01-40GHz

Features

- ✓ Frequency up to 40GHz
- ✓ Low VSWR
- ✓ Low Insertion loss





Specifications

PART NUMBER	MVE6193
DESCRIPTION	2.92mm Male to Female 63V Inner DC Block, 0.01-40GHz /Stainless Steel
ELECTRICAL	MATERIALS
FREQUENCY: 0.01-40GHz IMPEDANCE: 50 OHM INSERTION LOSS: 0.5dB MAX. VSWR: 1.3:1MAX. DC VOLTAGE: 63V MAX. OPERATING TEMPERATURE: -55°C to +125 °C	BODY: STAINLESS STEEL, PASSIVATED MALE PIN: BRASS, GOLD PLATED FEMALE PIN: BERYLLIUM BRONZE, GOLD PLATED INSULATORS: PEI

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

Typical Test Result

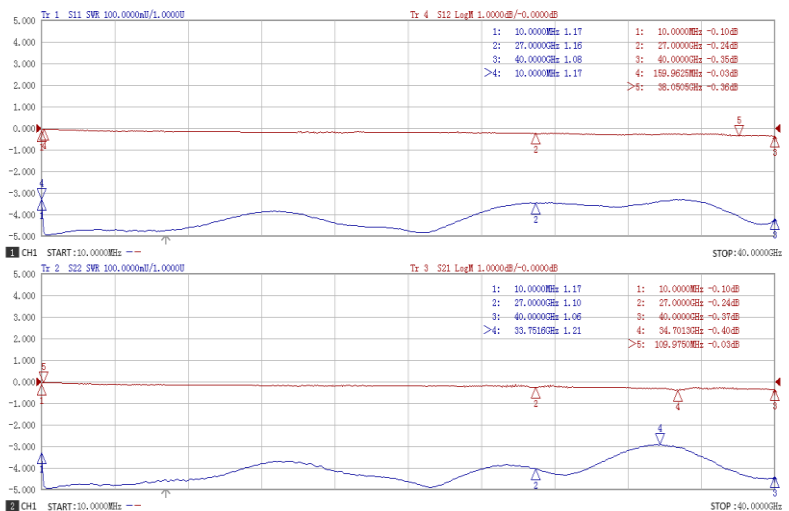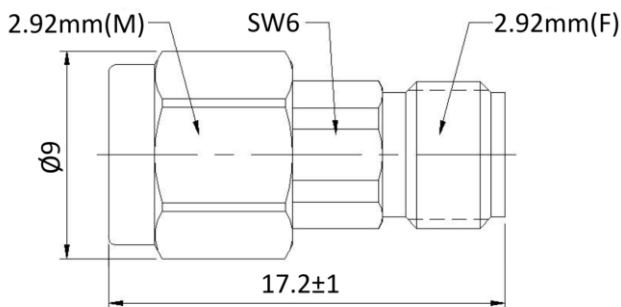

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

