



DC BLOCK

SMA Series 0.01-8GHz

Features

- ✓ Frequency up to 8 GHz
- ✓ 200V Protect DC Block
- ✓ Low VSWR & Insertion Loss




Specifications


PART NUMBER	MVE6411
DESCRIPTION	SMA Male to Female 200V DC Block, 0.01-8GHz/Stainless
ELECTRICAL	MATERIALS
FREQUENCY : 0.01-8GHz IMPEDANCE: 50 Ohm INSERTION LOSS: 0.7dB MAX. VSWR: 1.25:1MAX. DC VOLTAGE: 200V OPERATING Temp. -55°C~+ 100°C	CONNECTOR: PASSIVATED STAINLESS STEEL CONDUCTORS: GOLD PLATED BERYLLIUM COPPER

Tolerance: ±1.0mm


Outline Drawing (Unit: mm)



Electrical Schematic

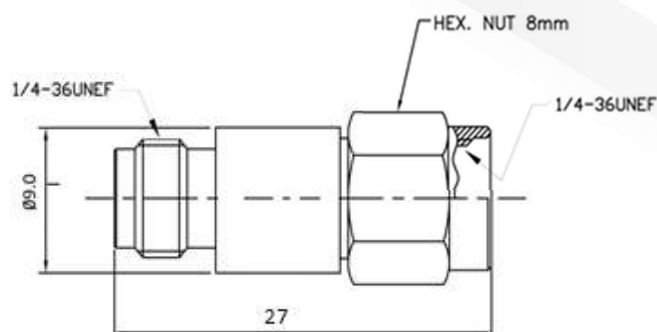

Typical Test Result

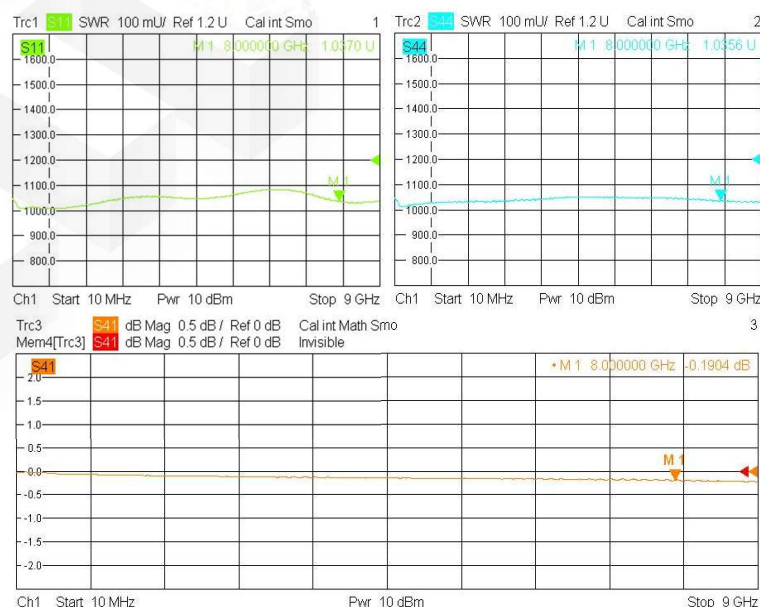

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

