



# COAXIAL CIRCULATOR

**SMA Series**  
**1.0-2.0GHz**

## Features

- ✓ Small Size
- ✓ Low VSWR
- ✓ Low Insertion Loss




## Specifications

**CONNECTOR TYPE: SMA FEMALE**  
**DIRECTION: CLOCKWISE 1→2→3**

PART NUMBER	FREQUENCY (GHz)	VSWR (MAX.)	INSERTION LOSS (MAX.)	ISOLATION (MIN.)	FORWARD POWER	TEMPERATURE
MVE7122	1.0-2.0	1.4:1	0.7dB	16dB	100W CW	0 ~ +60°C

Tolerance: ±0.5mm

## Outline Drawing (Unit: mm)

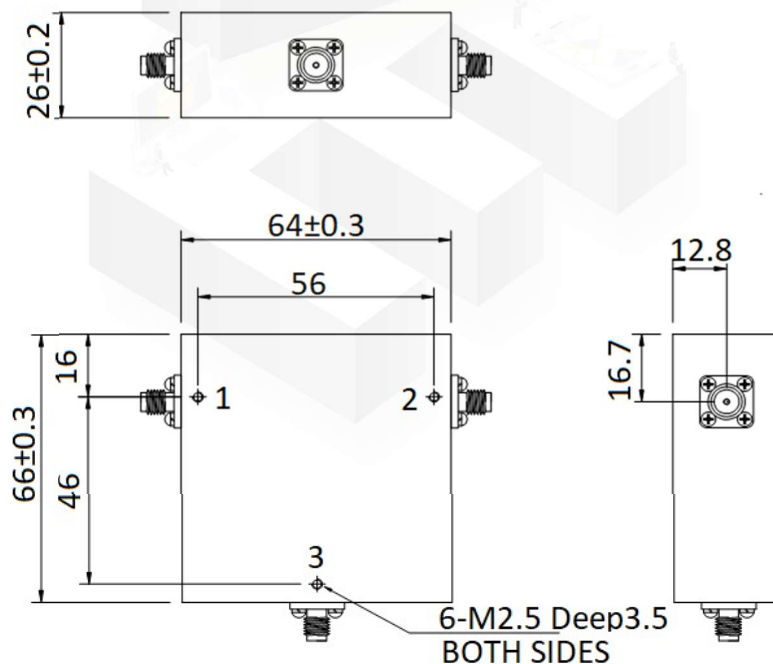

**NOTES:**

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

