



COAXIAL CIRCULATOR

0.6-1GHz
SMA Series

Features

- ✓ Frequency range cover from 0.6GHz to 1GHz
- ✓ Low insertion loss
- ✓ Low VSWR




Specifications

CONNECTOR TYPE: SMA FEMALE
DIRECTION: CLOCKWISE 1→2→3

PART NUMBER	FREQUENCY (GHz)	VSWR	INSERTION LOSS	ISOLATION	FORWARD POWER	TEMPERATURE
MVE7136	0.6-1	≤1.40	≤1.0dB	≥16dB	30W CW	-30~+70°C

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

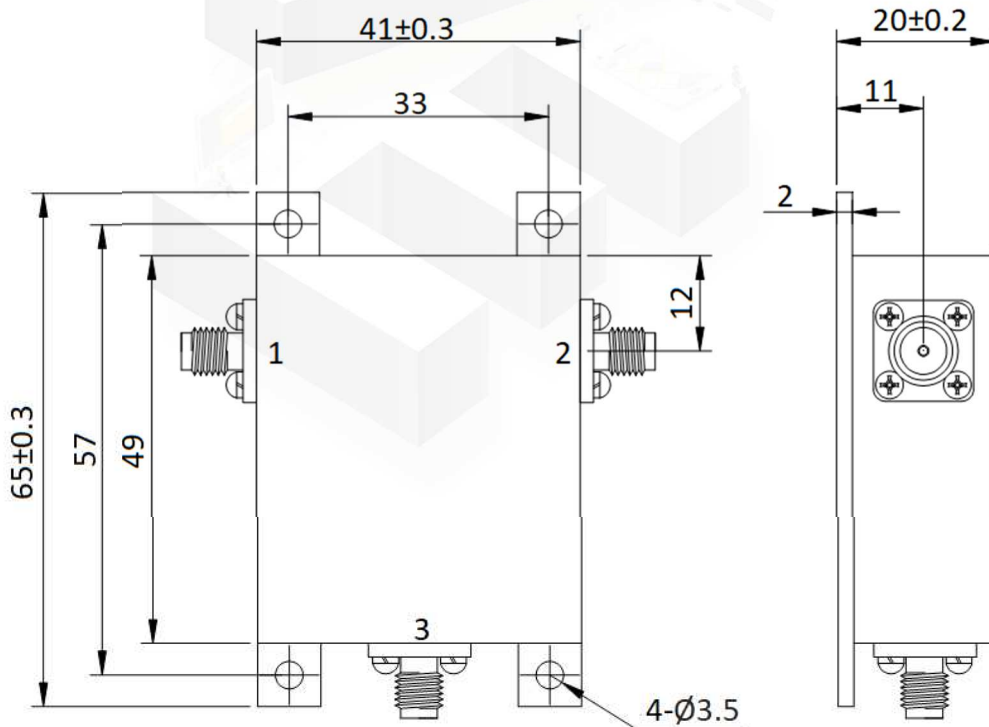



NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





Typical Test Report

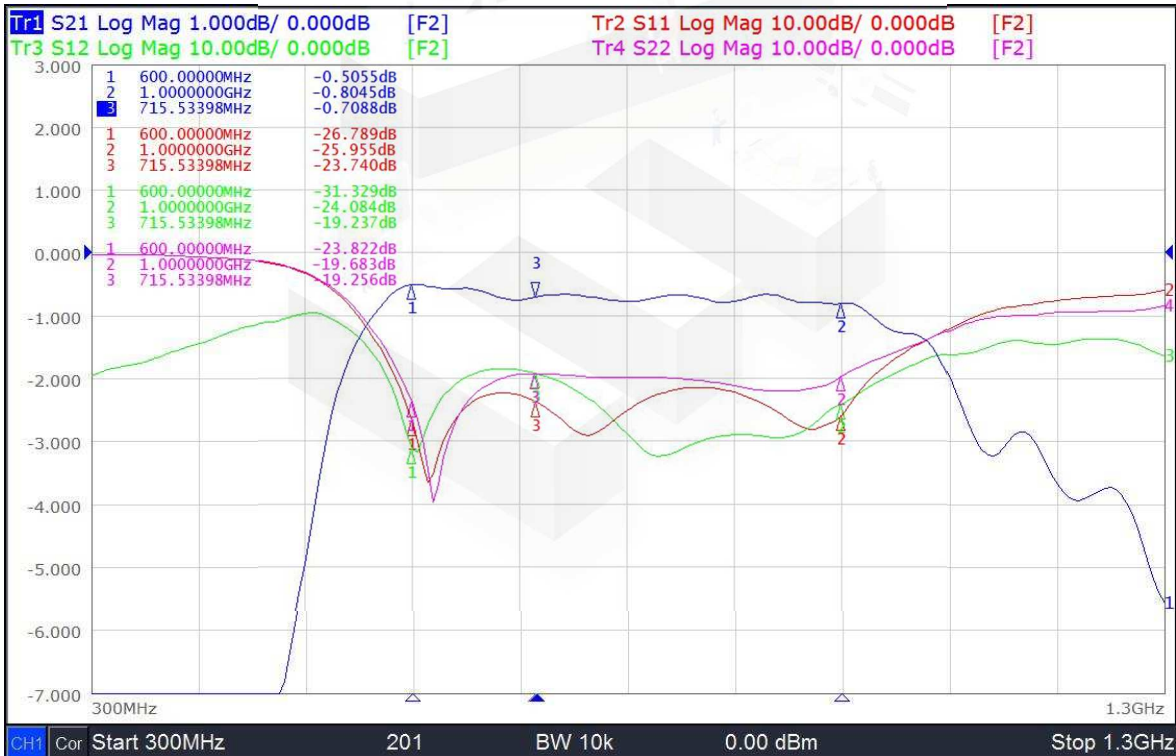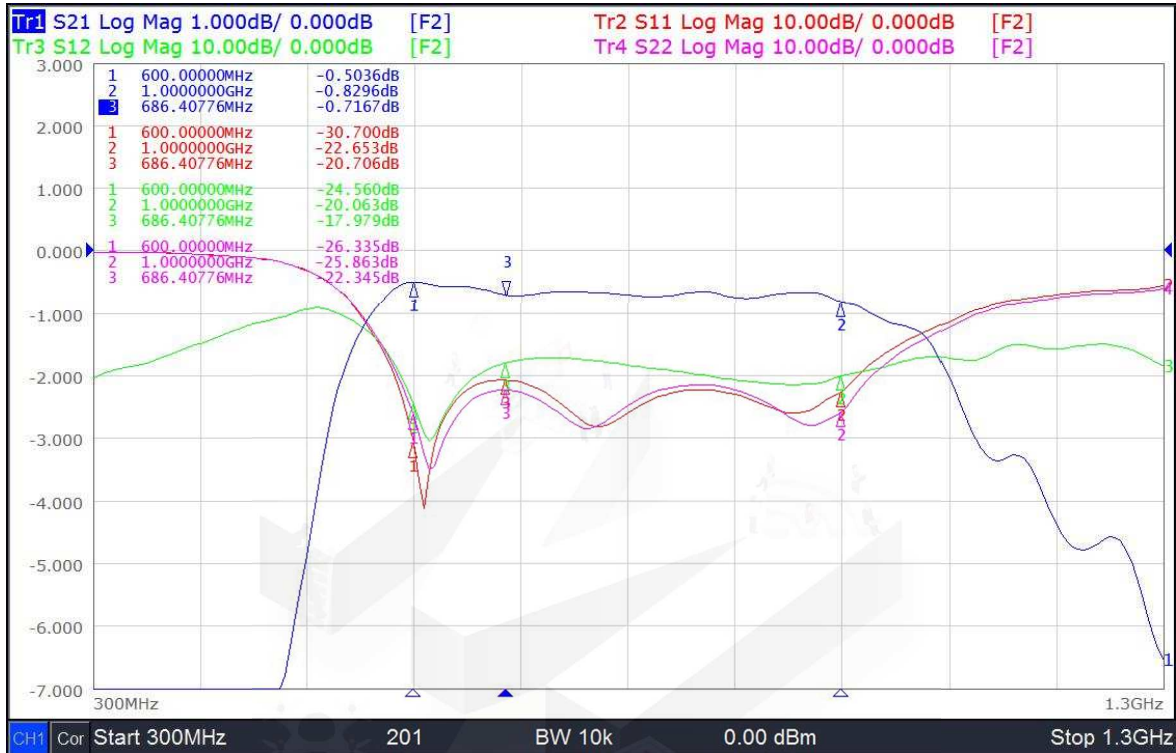

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

