



# COAXIAL CIRCULATOR

**350-512MHz**  
**SMA Series**

## Features

- ✓ Frequency range cover from 350-512MHz
- ✓ Low VSWR
- ✓ Low insertion loss




## Specifications

**CONNECTOR TYPE: SMA FEMALE**  
**DIRECTION: CLOCKWISE 1→2→3**  
**OPERATING TEMPERATURE: -40°C ~+70°C**

PART NUMBER	FREQUENCY (MHz)	VSWR	INSERTION LOSS	ISOLATION	POWER RATING
MVE7137	350-512	≤1.35:1@+25°C ≤1.40:1@-40~+70°C	≤0.7dB@+25°C ≤0.9dB@-40~+70°C	≥16dB	50W CW

Tolerance:±0.2mm

## Outline Drawing (Unit: mm)

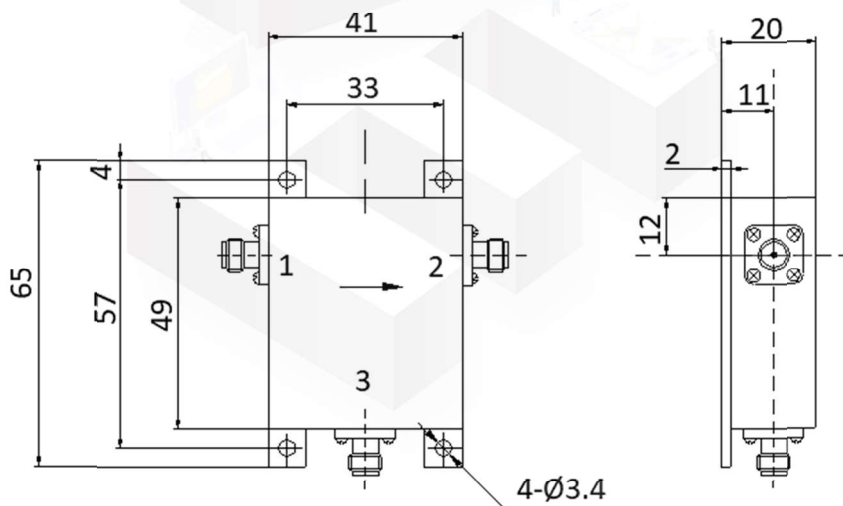

NOTES:  
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





## Typical Test Result

