




# COAXIAL CIRCULATOR

**6-12GHz**  
**SMA Series**

## Features

- ✓ Frequency range cover from 6GHz to 12GHz
- ✓ Small size, SMA female connector In/out
- ✓ Customer specify center frequency and bandwidth

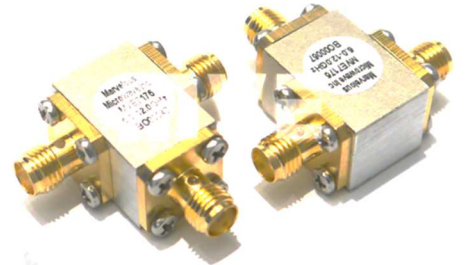


## Specifications

CONNECTOR TYPE: SMA FEMALE  
DIRECTION: CLOCKWISE


PART NUMBER	FREQUENCY (GHz)	VSWR	INSERTION LOSS	ISOLATION	POWER HANDLING	TEMPERATURE
MVE7176	6-12	≤ 1.45	≤0.6dB	≥15dB	30W	-30~+75℃

Tolerance:±0.5mm

## Outline Drawing (Unit: mm)

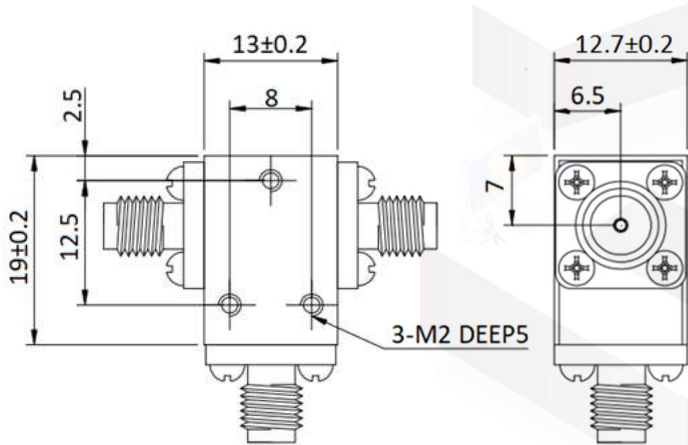

## Typical Test Result

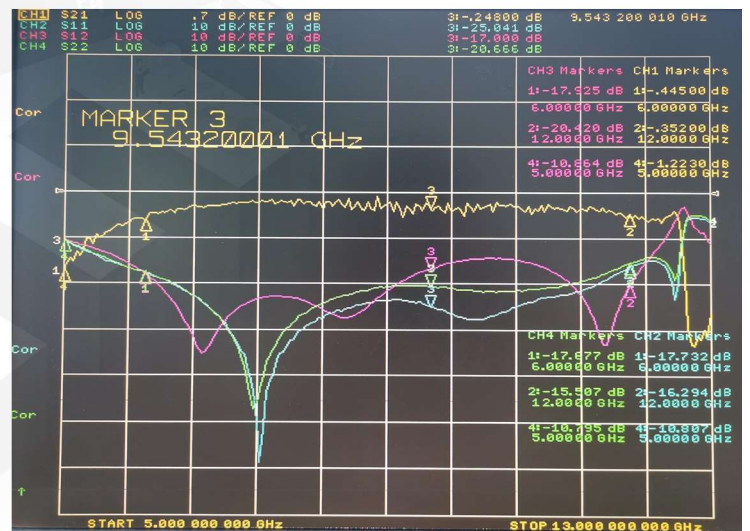

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

