



# COAXIAL CIRCULATOR

## MVE7231

# Dual Junction Series

## 2000-4000MHz

### Features

- ✓ Frequency range: 2000MHz~4000MHz bandwidth
- ✓ Dual Junction configuration
- ✓ Small size, low cost
- ✓ Power handling 100 Watts forward
- ✓ High RF Performance
- ✓ Operating temperature 0~+60°C


### Specifications

CONNECTOR: SMA FEMALE

PART NUMBER	FREQUENCY (MHz)	VSWR (MAX.)	INSERTION LOSS (MAX.)	ISOLATION (MIN.)	FORWARD POWER		TEMPERATURE
					Avg.	Max	
MVE7231	2000-4000	1.3	1.2 dB	36dB	100W	100W	+0~+60°C

Tolerance: X= ±0.2

### Outline Drawing (Unit: mm)

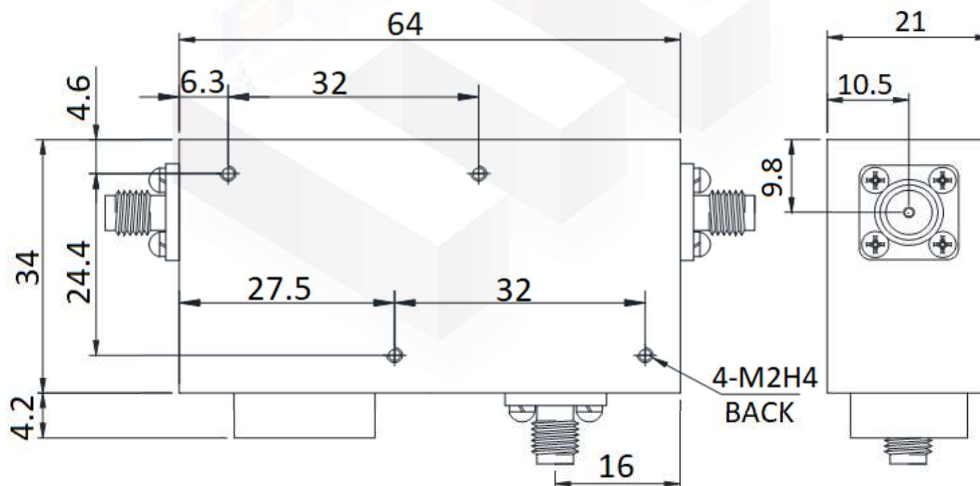

NOTES:  
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

