



# COAXIAL ISOLATOR

## 3-6GHz SMA Series

### Features

- ✓ Frequency range: 3.0-6.0GHz
- ✓ Low Insertion Loss
- ✓ High Isolation




### Specifications

CONNECTOR TYPE: SMA FEMALE  
DIRECTION: CLOCKWISE


PART NUMBER	FREQUENCY (GHz)	VSWR	INSERTION LOSS	ISOLATION	FORWARD POWER	REVERSE POWER	TEMPERATURE
MVE7548	3-6	≤ 1.30	≤0.5dB	≥18dB	100W CW	100W	0~+60℃

Tolerance:±0.5mm

### Outline Drawing (Unit: mm)

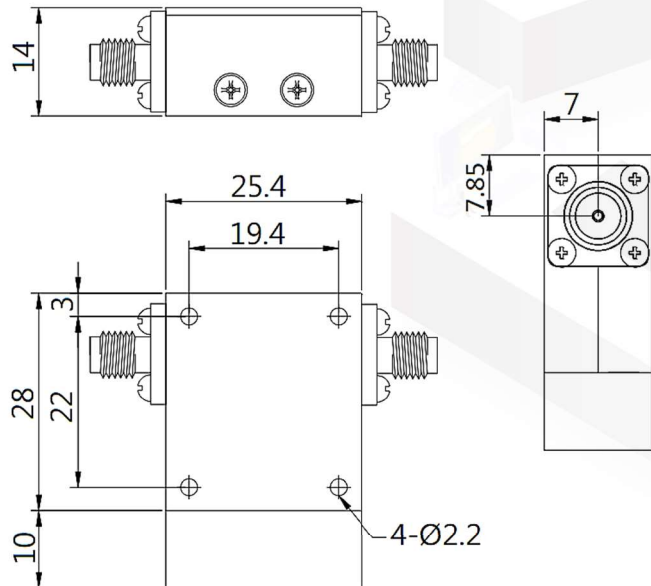

### Typical Test Result

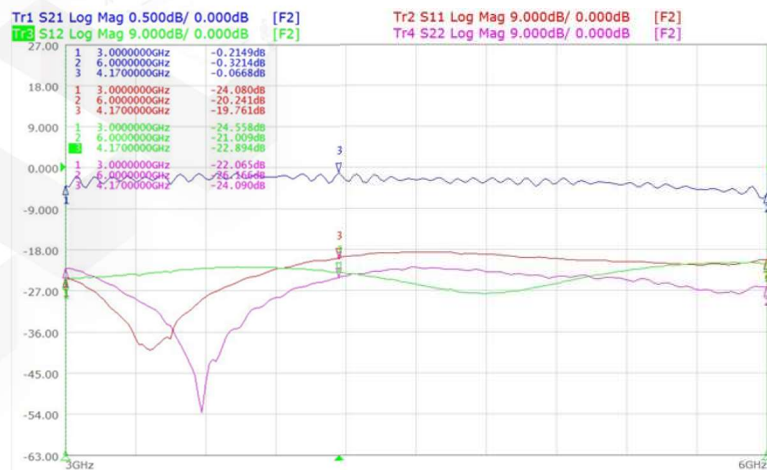

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

