



# COAXIAL ISOLATOR

**2-8GHz**  
**SMA Series**

## Features

- ✓ Frequency range cover from 2GHz to 8GHz
- ✓ Small size
- ✓ Low Insertion Loss



## Specifications

**CONNECTOR TYPE: SMA FEMALE**


**DIRECTION: CLOCKWISE**

**FINISH: NICKEL PLATED**

PART NUMBER	FREQUENCY (GHz)	VSWR	INSERTION LOSS	ISOLATION	POWER		TEMPERATURE
					FORWARD	REVERSE	
MVE7562	2-8	≤1.80	≤1.6dB	≥12dB	10W	10W	-0~+60°C

Tolerance: ±0.2mm

## Outline Drawing (Unit: mm)

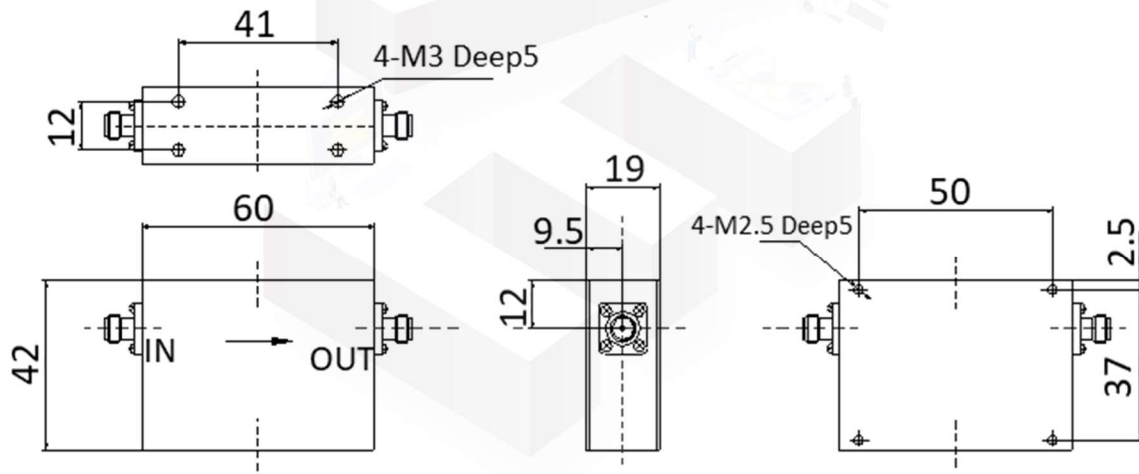

**NOTES:**

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





## Typical Test Result

