



POWER DIVIDER

Resistive Type
DC-4.2GHz

Features

- ✓ Frequency Range: DC to 4.2 GHz
- ✓ Low Insertion Loss
- ✓ Low VSWR




Specifications

FREQUENCY RANGE: DC-4.2GHz
CONNECTOR TYPE: SMA FEMALE
TEMPERATURE RANGE: -40°C TO +80°C


PART NUMBER	WAYS	INSERTION LOSS	AMPLITUDE UNBALANCE	VSWR	AVERAGE POWER
MVE8246	2WAY	≤ 6±1.0dB	≤ ±0.4dB	≤ 1.30:1	0.5W

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

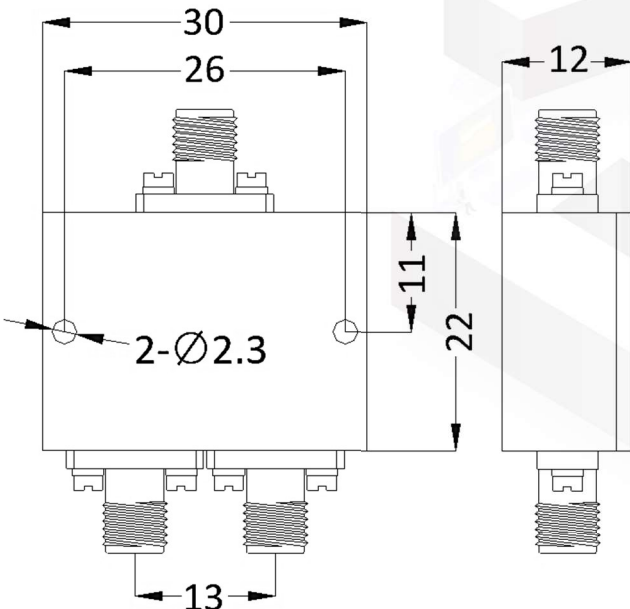

Typical Test Result

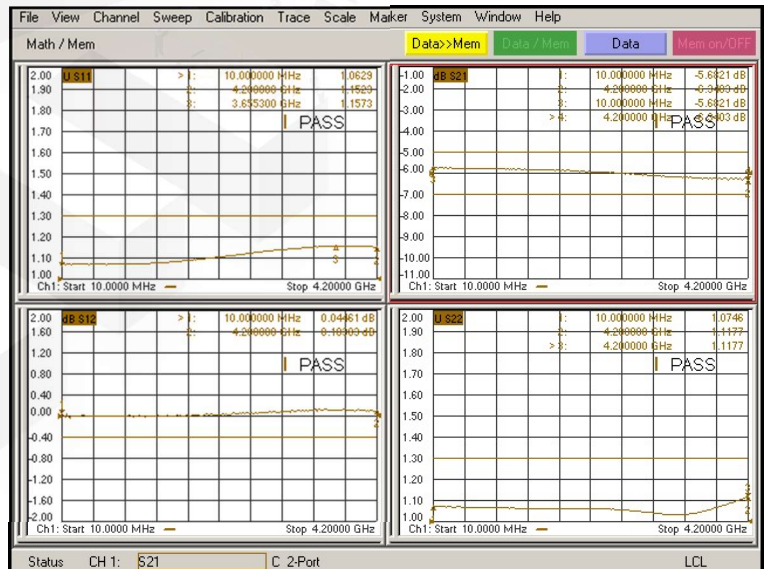

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

