



POWER DIVIDER

Resistive Type DC-6GHz

Features

- ✓ Frequency Range: DC to 6 GHz
- ✓ Low Insertion Loss
- ✓ Low VSWR




Specifications

CONNECTOR TYPE: SMA FEMALE
TEMPERATURE RANGE: -40°C TO +85°C

PART NUMBER	FREQUENCY	WAYS	INSERTION LOSS	AMPLITUDE UNBALANCE	VSWR	POWER HANDLING (CW)
MVE8247	DC-6GHz	2WAY	≤6±1.0dB	≤±0.4dB	≤ 1.3:1	0.5W

Tolerance:±0.5mm

Outline Drawing (Unit: mm)

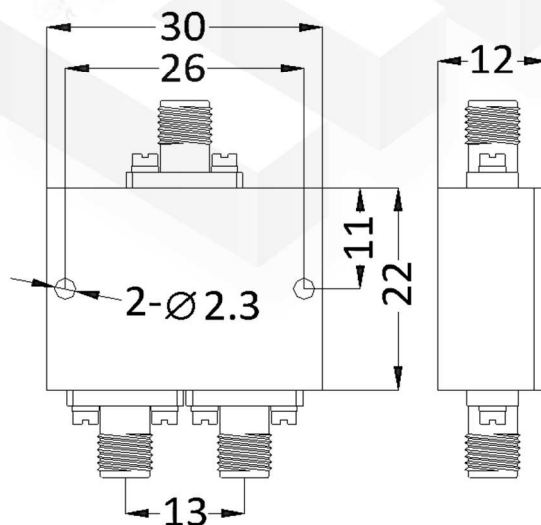



NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





Typical Test Result

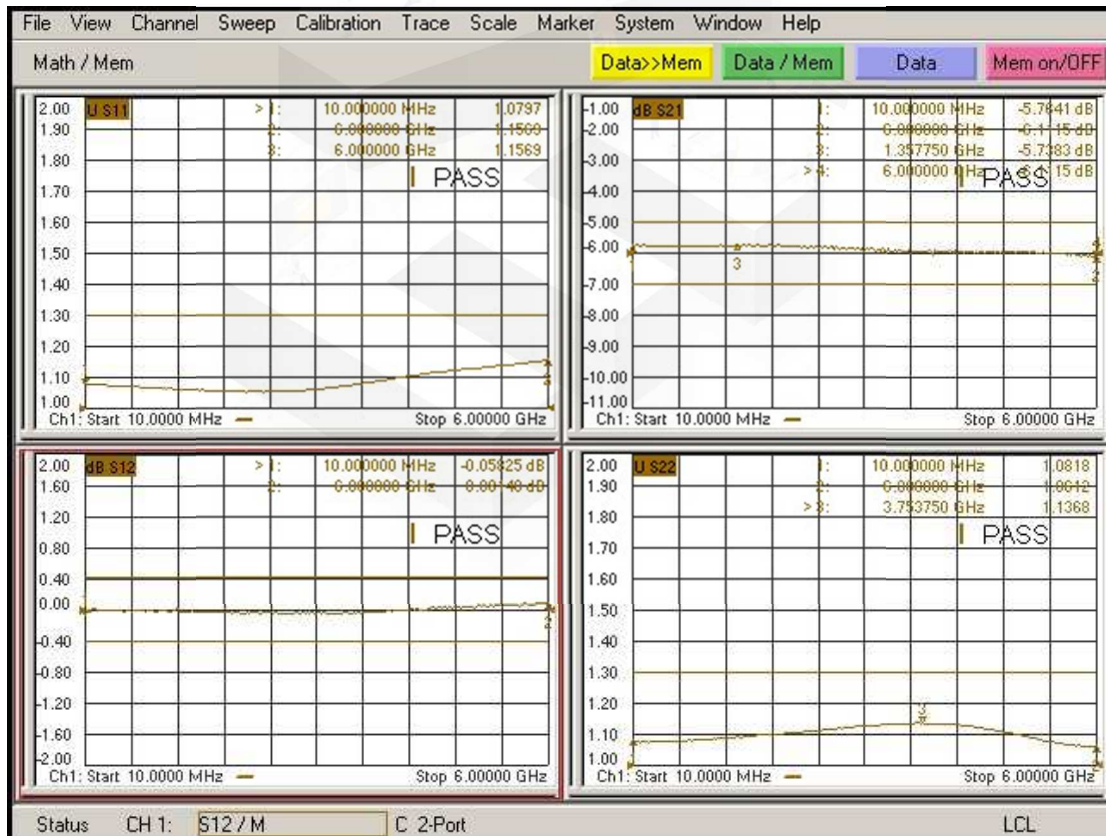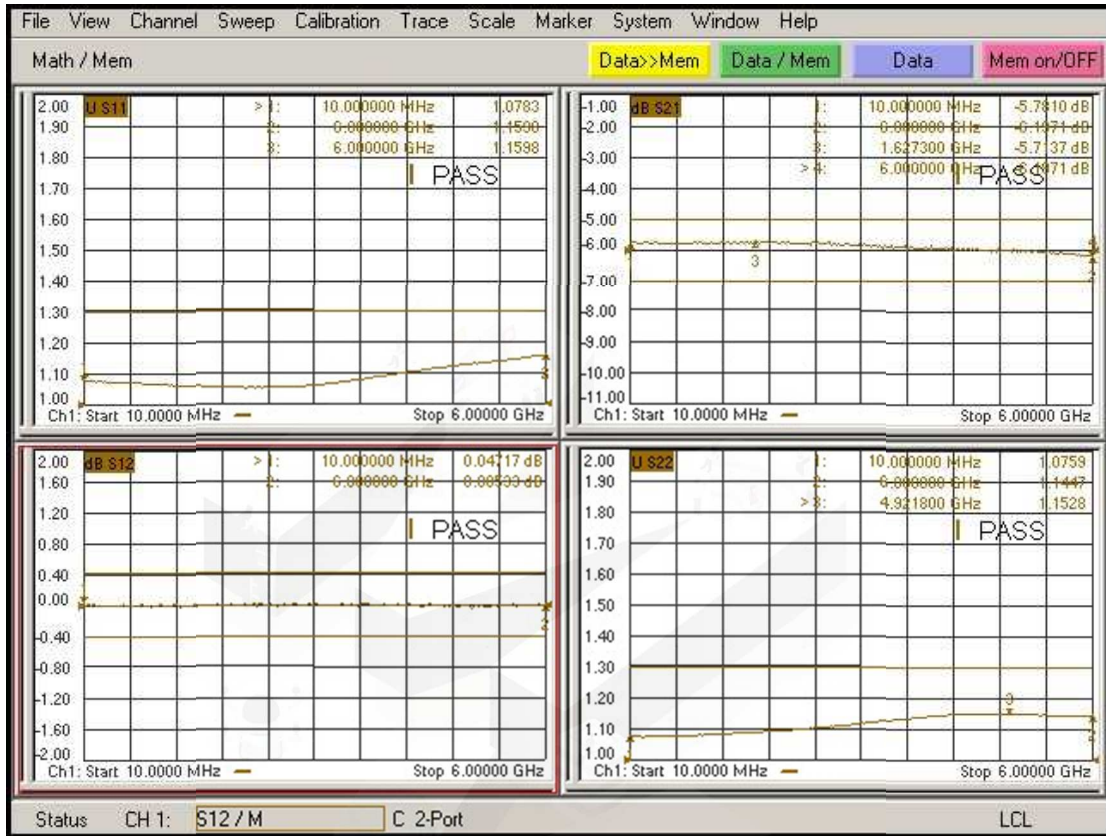

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

