



POWER DIVIDER

Resistive SMA Type DC-8GHz 8WAY

Features

- ✓ Frequency Range: DC to 8GHz
- ✓ Low Insertion Loss
- ✓ Low VSWR



Specifications

FREQUENCY RANGE: DC-8GHz

CONNECTOR TYPE: SMA Female


OPERATIONAL TEMPERATURE: -40°C TO +80°C

PART NUMBER	WAY	INSERTION LOSS	VSWR	PHASE UNBALANCE	AMPLITUDE UNBALANCE	POWER HANDLING	
						Forward	Reversed
MVE8261	8WAY	≤2.0dB	≤1.5:1	≤±10° (TYP. ≤±7°)	≤±1.0dB	≤1W	≤0.1W

*Insertion Loss does not include 18 dB theoretical loss.

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

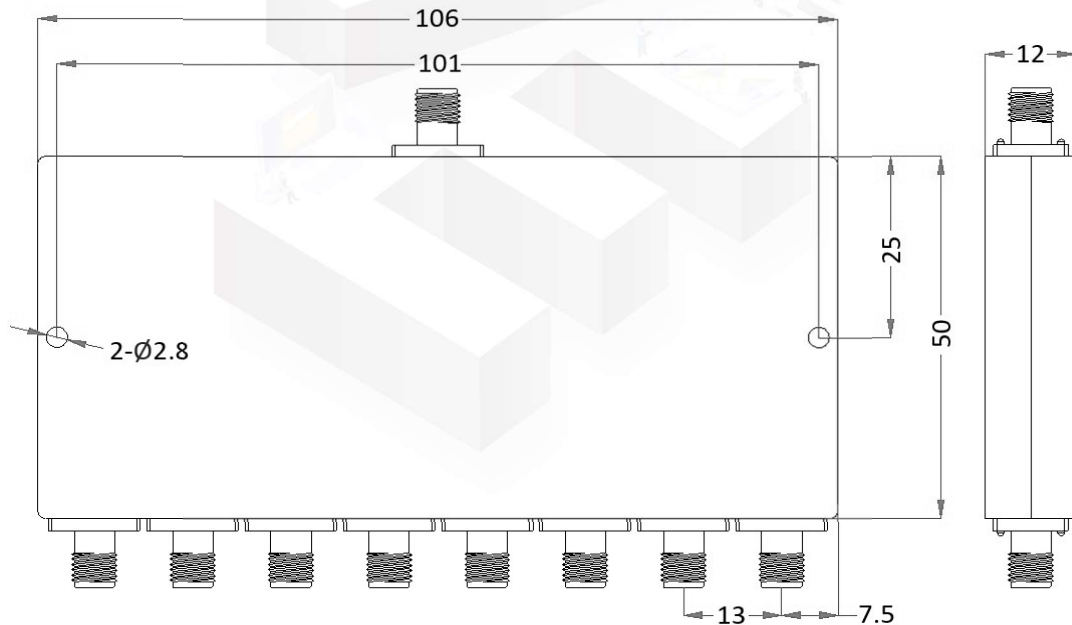

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





Typical Test Result

