



POWER DIVIDER


2.92 mm Resistive Type DC-40GHz

Features

- ✓ Frequency up to 40GHz
- ✓ 2.92mm Interface
- ✓ Low Insertion Loss

Specifications

FREQUENCY RANGE: DC-40GHz
CONNECTOR TYPE: 2.92mm FEMALE
SURFACE FINISH: ALUMINUM, NICKEL PLATED
OPERATIONAL TEMPERATURE RANGE: -40°C TO +80°C

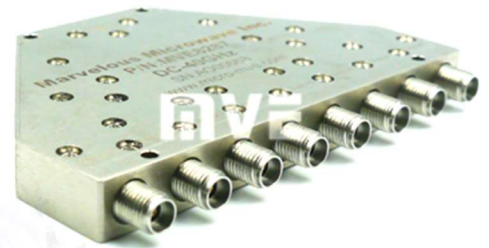


PART NUMBER	WAYS	INSERTION LOSS	AMPLITUDE BALANCE	PHASE BALANCE	VSWR		POWER HANDLING	PEAK POWER
					INPUT	OUTPUT		
MVE8287	8WAY	≤14dB	±1.0dB	±12°	≤1.60:1	≤2.50:1	1 Watt	10 Watt


*Insertion Loss does not include 9 dB theoretical loss.

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

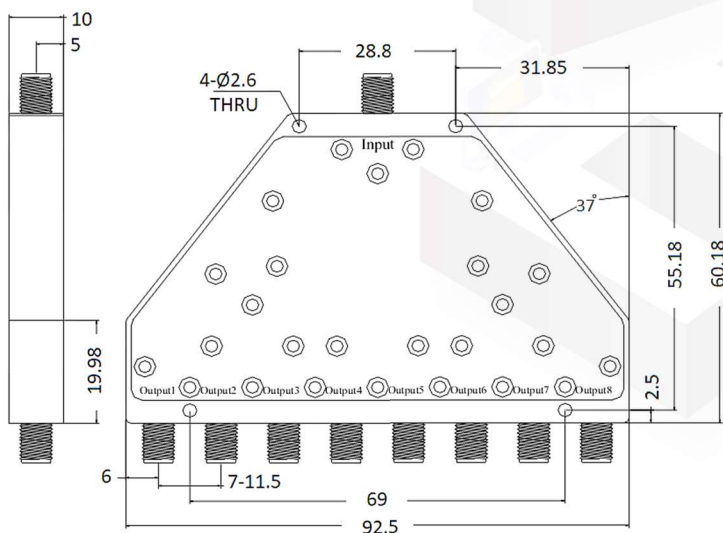

Typical Test Result

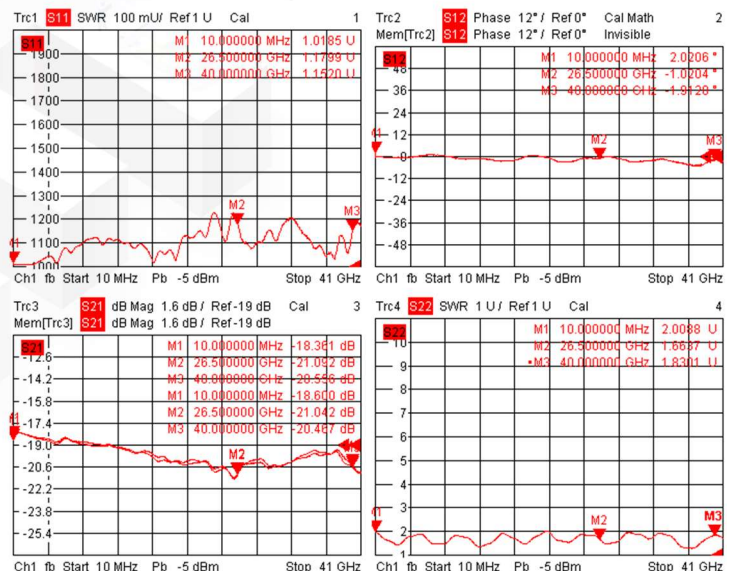

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

