



POWER DIVIDER

0.1-1.5GHz
6WAY

Features

- ✓ Operating Frequency Range Coverage From 0.1GHz to 1.5GHz
- ✓ Ultra Broad band
- ✓ Low Insertion Loss


Specifications

FREQUENCY RANGE: 0.1-1.5GHz
CONNECTOR TYPE: SMA FEMALE
TEMPERATURE RANGE: -55°C TO +105°C

| PART NUMBER | WAYS | INSERTION LOSS | PHASE UNABLANCE | AMPLITUDE UNBALANCE | ISOLATION | VSWR | | POWER HANDLING(CW) | |
|-------------|------|----------------|-----------------|---------------------|-----------|-------|--------|--------------------|---------|
| | | | | | | INPUT | OUTPUT | Foward | Reverse |
| MVE8509-6 | 6WAY | ≤2.2dB | ±6° | ±0.4dB | ≥18dB | 1.8 | 1.5 | 10W | 0.1W |

Tolerance:±0.25mm

Outline Drawing (Unit: mm)

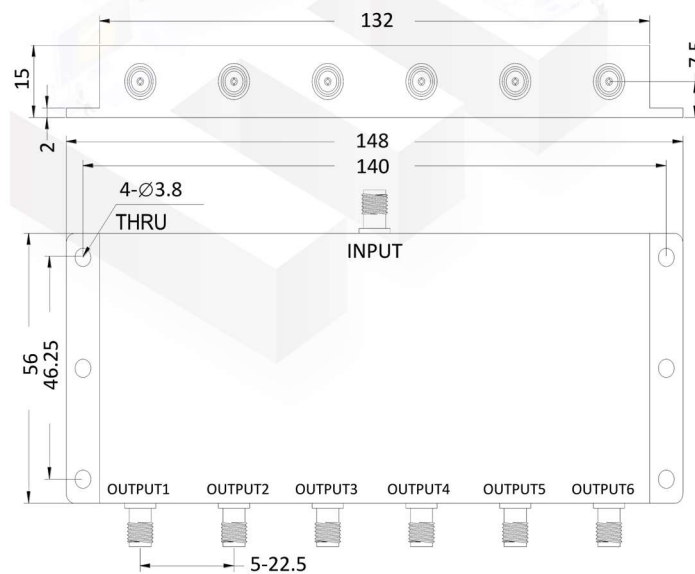

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

