



POWER DIVIDER

0.5-6GHz
2WAY

Features

- ✓ Low VSWR, high Isolation, unconditional stable
- ✓ Broad band operation from 0.5 to 6.0GHz
- ✓ High Isolation

Specifications

FREQUENCY RANGE: 0.5-6GHz

CONNECTOR TYPE:N FEMALE


TEMPERATURE RANGE: -40°C TO +80°C

PART NUMBER	WAYS	INSERTION LOSS (MAX.)	PHASE UNABLANCE	AMPLITUDE UNBALANCE	ISOLATION (MIN.)	VSWR		POWER HANDLING(CW)	
						Input	Output	Forward	Reverse
MVE8515	2WAY	1.5dB	±3°	±0.3dB	≥20dB@500-4000MHz ≥25dB@4000-6000MHz	1.5:1 @500-4000MHz 1.3:1 @4000-6000MHz	1.3:1	20W	2W

*Insertion Loss does not include 3 dB theoretical loss.

Tolerance:±0.5mm

Outline Drawing (Unit: mm)

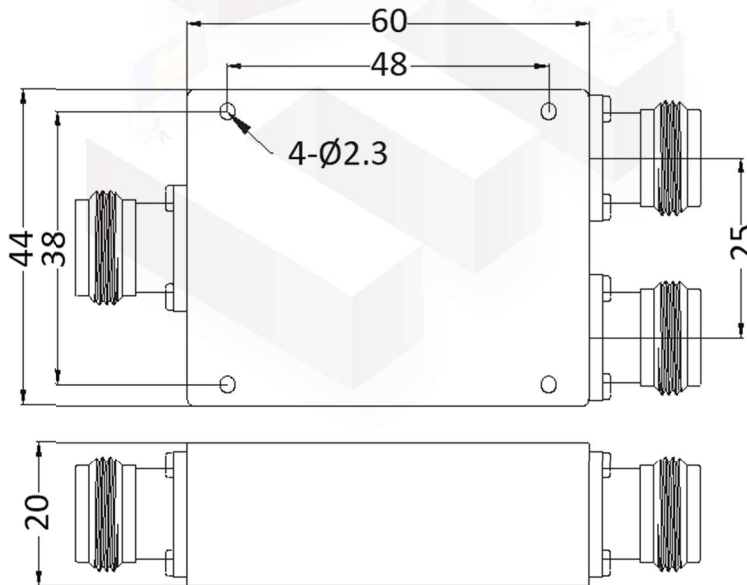

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

