



POWER DIVIDER

MVE8548

0.5-6GHz
8WAY

Features

- ✓ Frequency Range: 0.5 to 6GHz
- ✓ Low Insertion Loss
- ✓ Broad band



Specifications

CONNECTOR TYPE: SMA FEMALE


TEMPERATURE RANGE: -40°C TO +80°C

PART NUMBER	WAYS	INSERTION LOSS (MAX.)	PHASE UNABLANCE	AMPLITUDE UNBALANCE	ISOLATION (MIN.)	VSWR		POWER HANDLING(CW)	
						Input	Output	Forward	Reverse
MVE8548	8WAY	2.5dB	±5°	±0.5dB	18dB	1.5:1	1.4:1	20W	2W

*Insertion Loss does not include 9 dB theoretical loss.

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

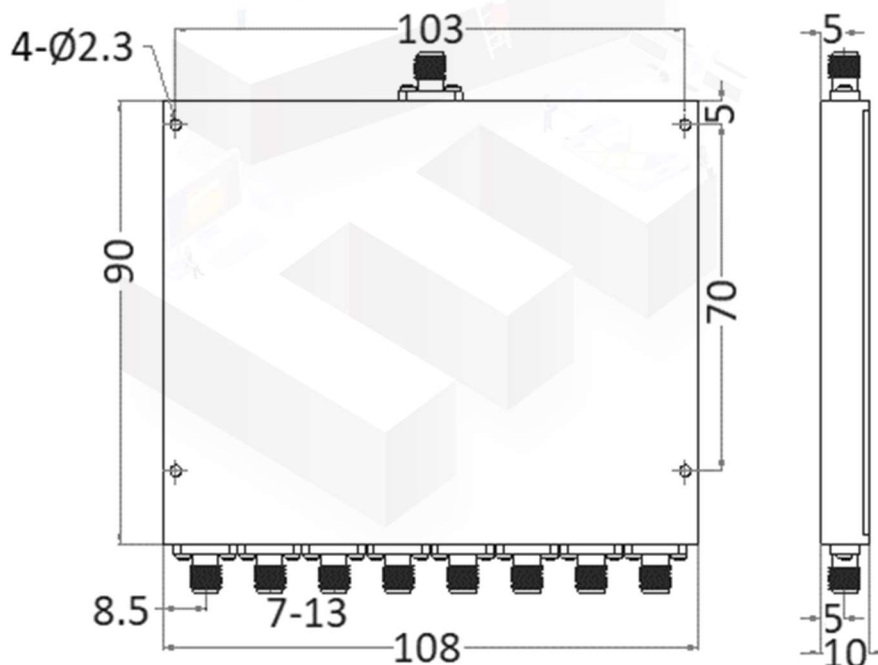



NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





Typical Test Result

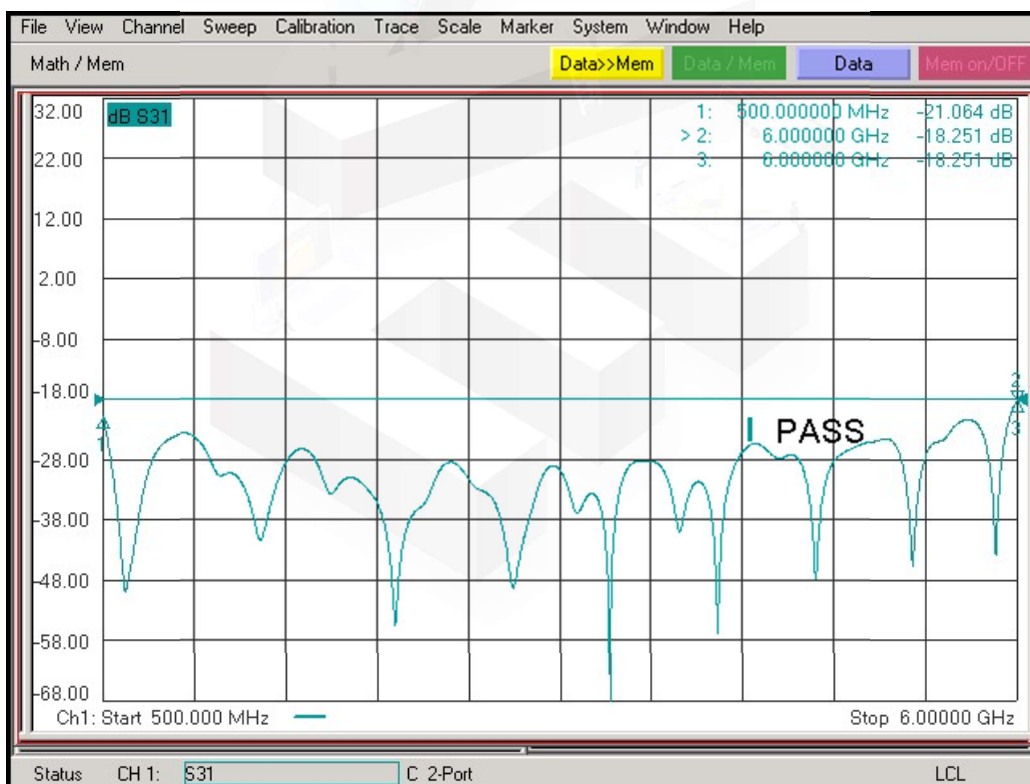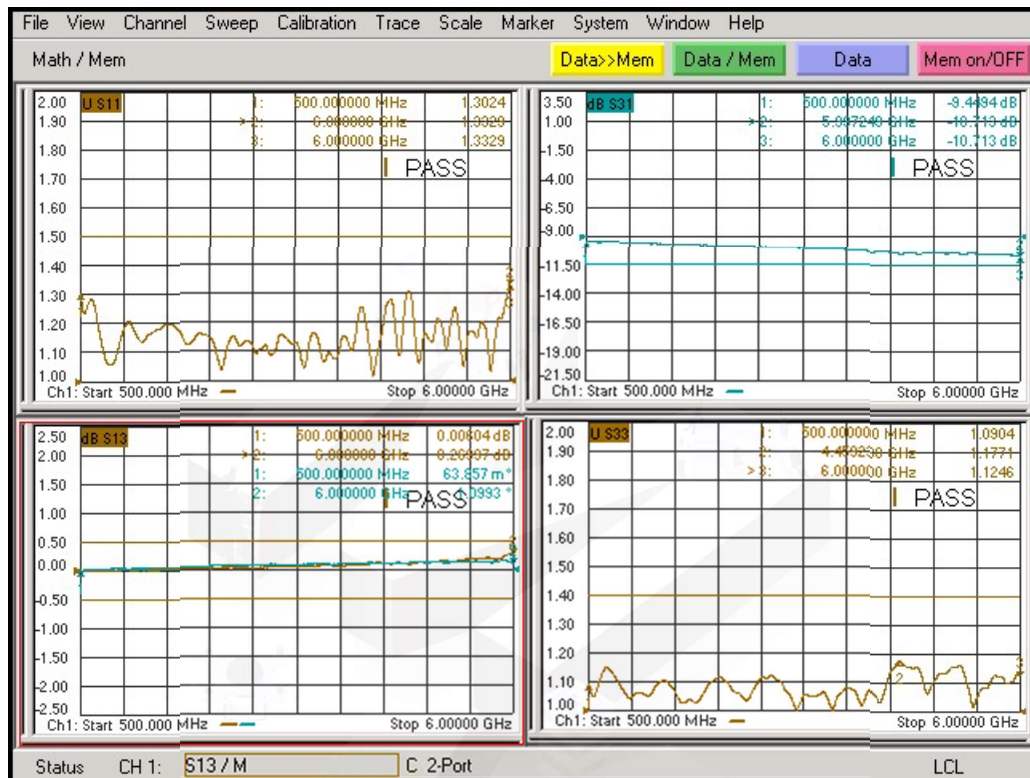

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

