



# POWER DIVIDER


**5-8GHz**  
**2WAY 90°**

## Feature

- ✓ Impedance :50ohm
- ✓ Low Insertion Loss
- ✓ High Isolation

## Specifications


**FREQUENCY RANGE: 5-8GHz**  
**CONNECTOR TYPE: SMA FEMALE**  
**OPERATION TEMPERATURE: -40°C TO +80°C**

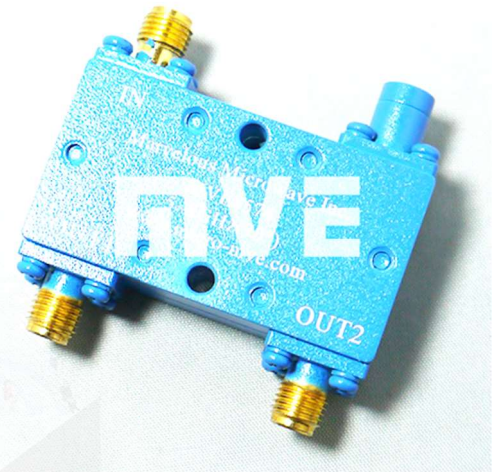

PART NUMBER	WAYS	INSERTION LOSS (MAX.)	AMPLITUDE UNBALANCE (MAX.)	ISOLATION (MIN.)	VSWR (MAX.)	PHASE BALANCE (MAX.)	POWER HANDLING(CW)
MVE8574	2WAY	0.5dB	±0.5dB	18dB	1.40:1	90±5°	10W (Forward) 1W (Reverse)

\*Insertion Loss does not include 3 dB split loss.

## Outline Drawing (Unit: mm)

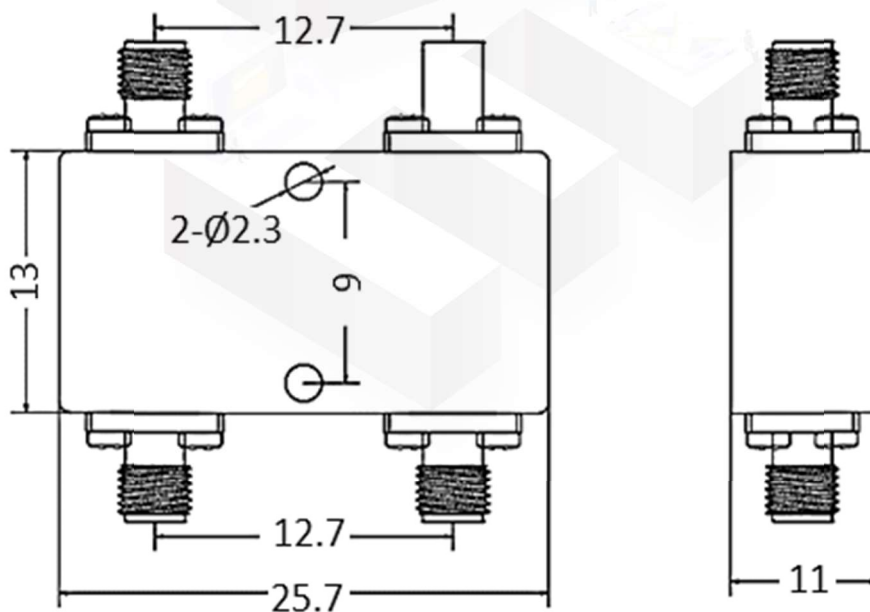

NOTES:  
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY