



POWER DIVIDER

2-8 GHz
2WAY SMA

Features

- ✓ Frequency up to 8 GHz
- ✓ Low Insertion Loss
- ✓ High Isolation



Specifications

FREQUENCY RANGE: 2-8 GHz

CONNECTOR TYPE: SMA FEMALE


TEMPERATURE RANGE: -40°C TO +70°C

PART NUMBER	WAYS	INSERTION LOSS (MAX)	PHASE UNBALANCE	AMPLITUDE UNBALANCE	ISOLATION (MIN.)	VSWR (TYP)		POWER HANDLING(CW)	
						Input	Output	Forward	Reverse
MVE8576-1	2WAY	0.6dB	±3	±0.5dB	18dB	1.3:1	1.2:1	35W	2W

*Insertion Loss does not include 3 dB theoretical loss.

Tolerance: ±0.5

Outline Drawing (Unit: mm)

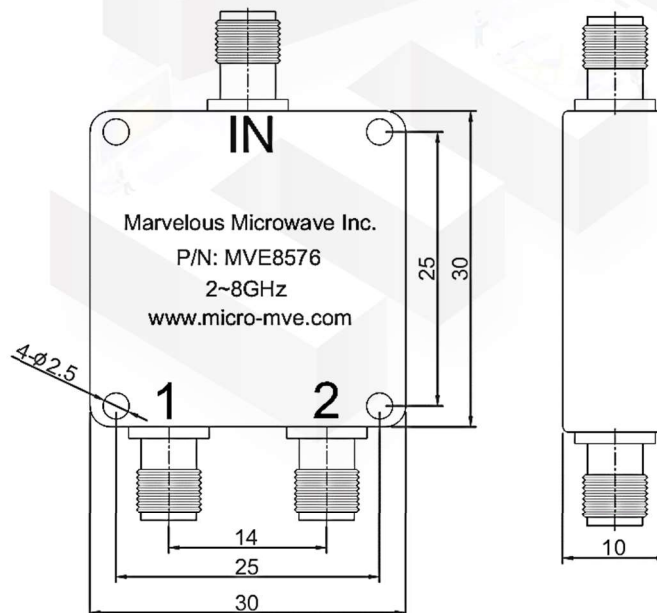

NOTES:


1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY






Typical Test Result

PORT1

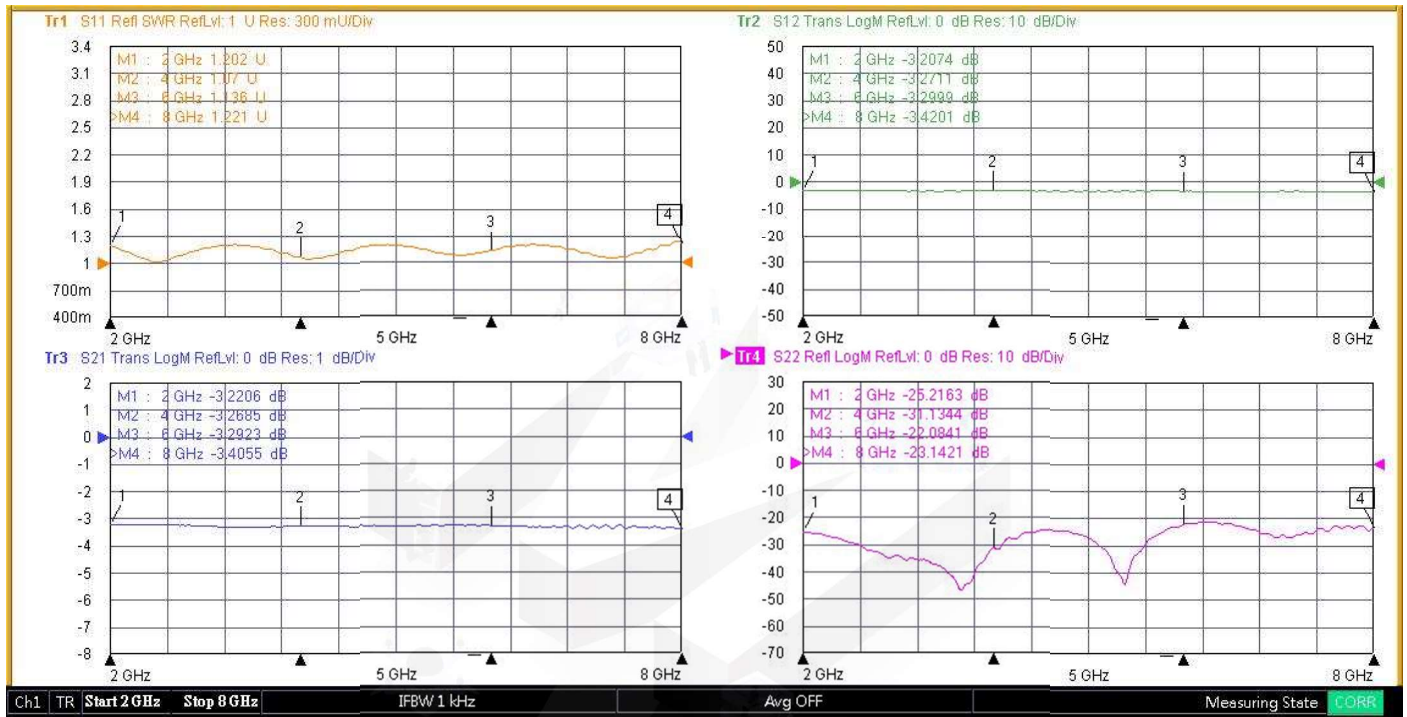


PORT2

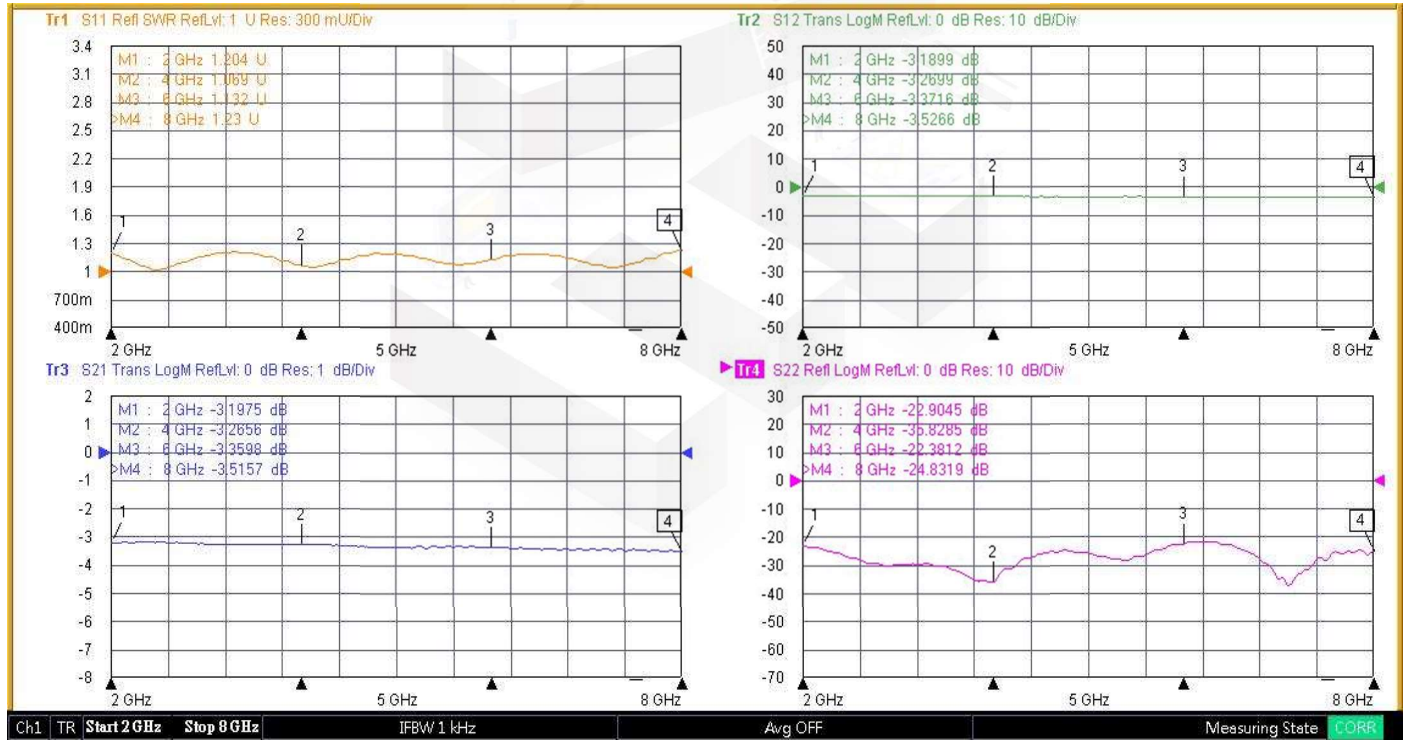



Isolation

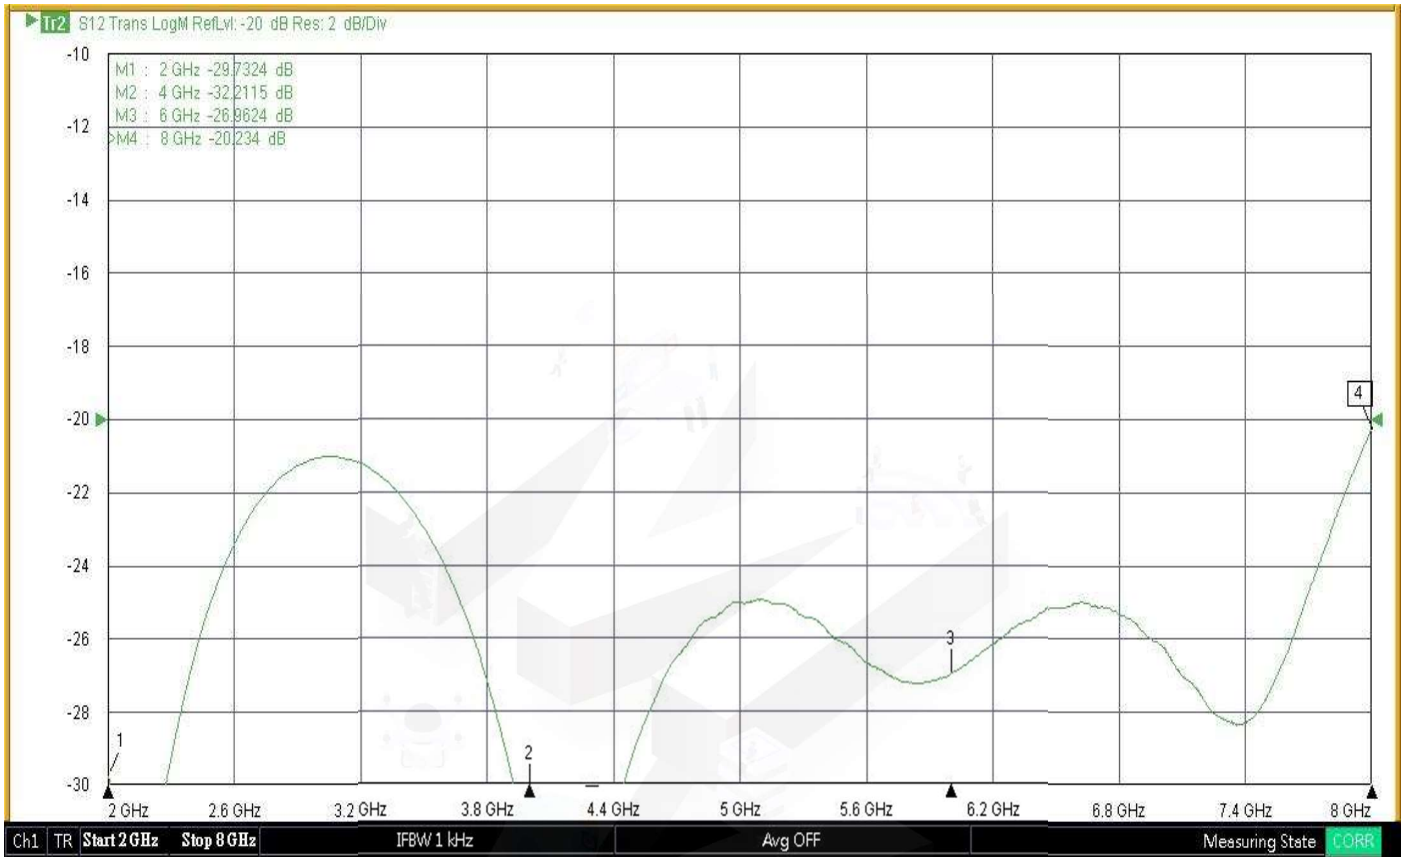

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

