



POWER DIVIDER

2000-8000 MHz
4WAY

Features

- ✓ High Isolation
- ✓ Low VSWR
- ✓ Low Insertion Loss

Specifications

FREQUENCY RANGE: 2-8 GHz

CONNECTOR TYPE: SMA FEMALE

OPERATING TEMPERATURE: -40~+80°C

STORAGE TEMPERATURE: -45~+85°C




PART NUMBER	WAYS	INSERTION LOSS	PHASE BALANCE	AMPLITUDE BALANCE	ISOLATION	VSWR		AVERAGE POWER	
						Input	Output	Forward	Reverse
MVE8577	4WAY	≤1.2dB	≤±4°	≤±0.2dB	≥20dB	≤1.40:1	≤1.30:1	20W	2W

*Insertion Loss does not include 6.0 dB theoretical loss.

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

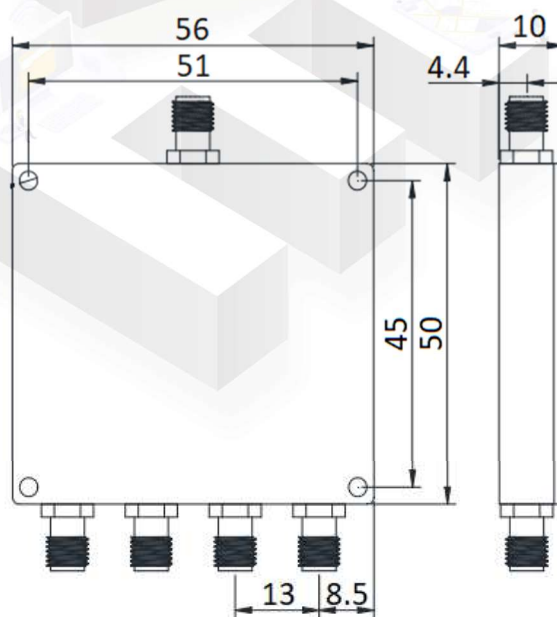

NOTES:


1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





Typical Test Result

Insertion Loss VSWR Amplitude Balance Phase Balance

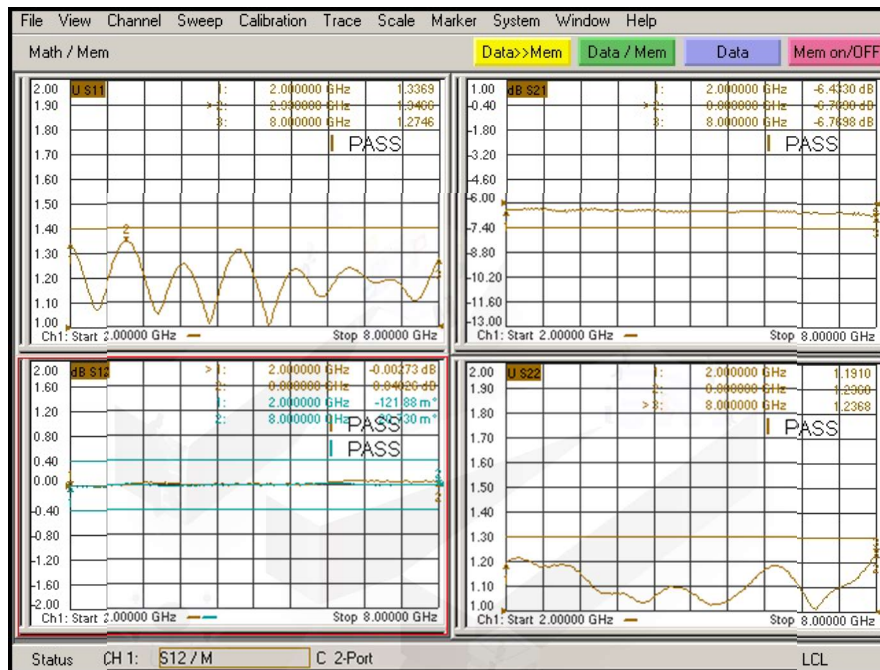

Isolation



NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

