



POWER DIVIDER

2-50GHz
4WAY

Features

- ✓ Operating Frequency Range Coverage From 2GHz to 50GHz
- ✓ Low VSWR
- ✓ Low Insertion Loss

Specifications

FREQUENCY RANGE: 2-50GHz

CONNECTOR TYPE: 2.4mm(F)

TEMPERATURE RANGE: -55°C TO +85°C


SURFACE FINISH: ALUMINUM, BLUE PAINTED

PART NUMBER	WAYS	INSERTION LOSS	PHASE UNABLANCE	AMPLITUDE UNBALANCE	ISOLATION	VSWR		POWER HANDLING(CW)
						Input	Ouput	
MVE8625	4WAY	≤4.8dB	±10°	±0.6dB	≥16dB	1.7:1	1.7:1	16W

*Insertion Loss does not include 6 dB theoretical loss.

Tolerance: X= ±5%

Outline Drawing (Unit: mm)

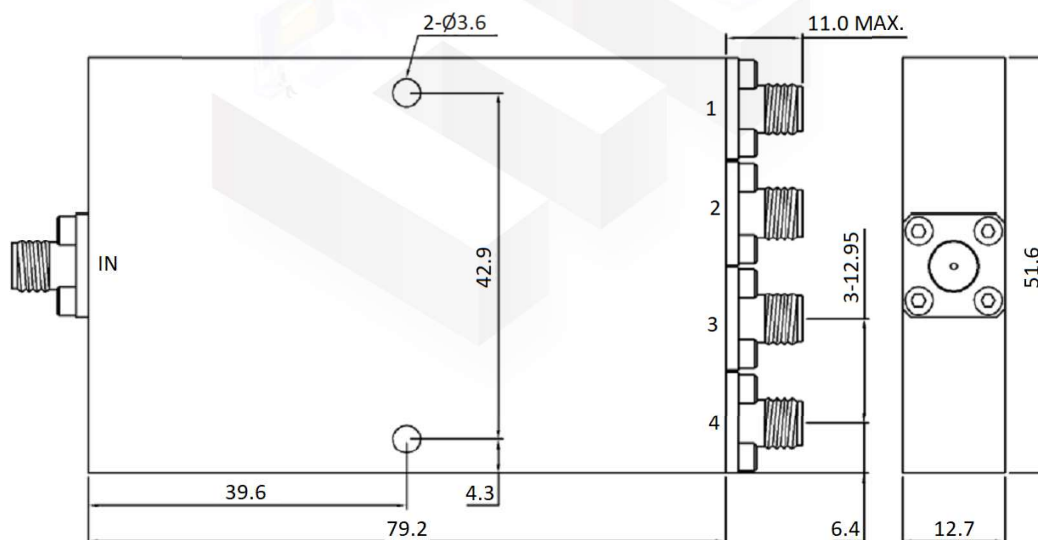

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

