



# POWER DIVIDER

**5MHz-1000MHz**  
**8WAY**

## Features

- ✓ Frequency Range: 5 to 1000MHz
- ✓ High Isolation
- ✓ Low Insertion Loss




## Specifications

**FREQUENCY RANGE: 5-1000MHz**  
**CONNECTOR TYPE: F FEMALE**  
**TEMPERATURE RANGE: -5°C to +45°C**

PART NUMBER	WAY	INSERTION LOSS	ISOLATION	SHEILDING ATTENUATION	RETURN LOSS
MVE8906	8	5-65MHz≤11.3dB 65-550MHz≤11.6dB 550-750MHz≤12.0dB 750-1000MHz≤12.8dB	5-65MHz≥27dB 65-550MHz≥27dB 550-750MHz≥27dB 750-1000MHz≥25dB	110dB @ 5-1000MHz	5-65MHz≥16dB 65-550MHz≥16dB 550-750MHz≥16dB 750-1000MHz≥16dB

Tolerance: ±0.5mm

## Outline Drawing (Unit: mm)

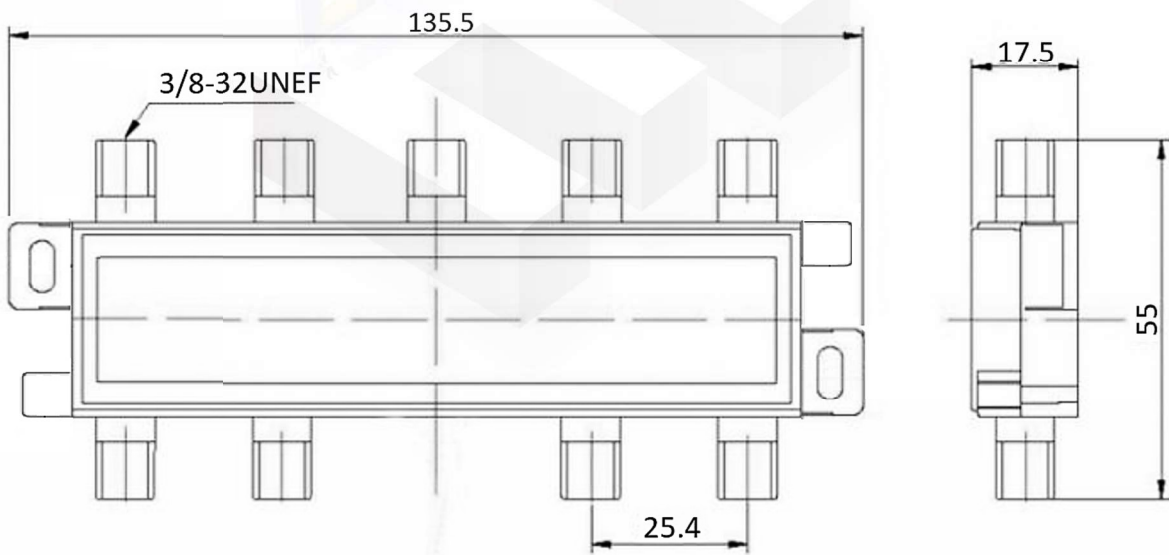


NOTES:  
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





## Typical Test Result

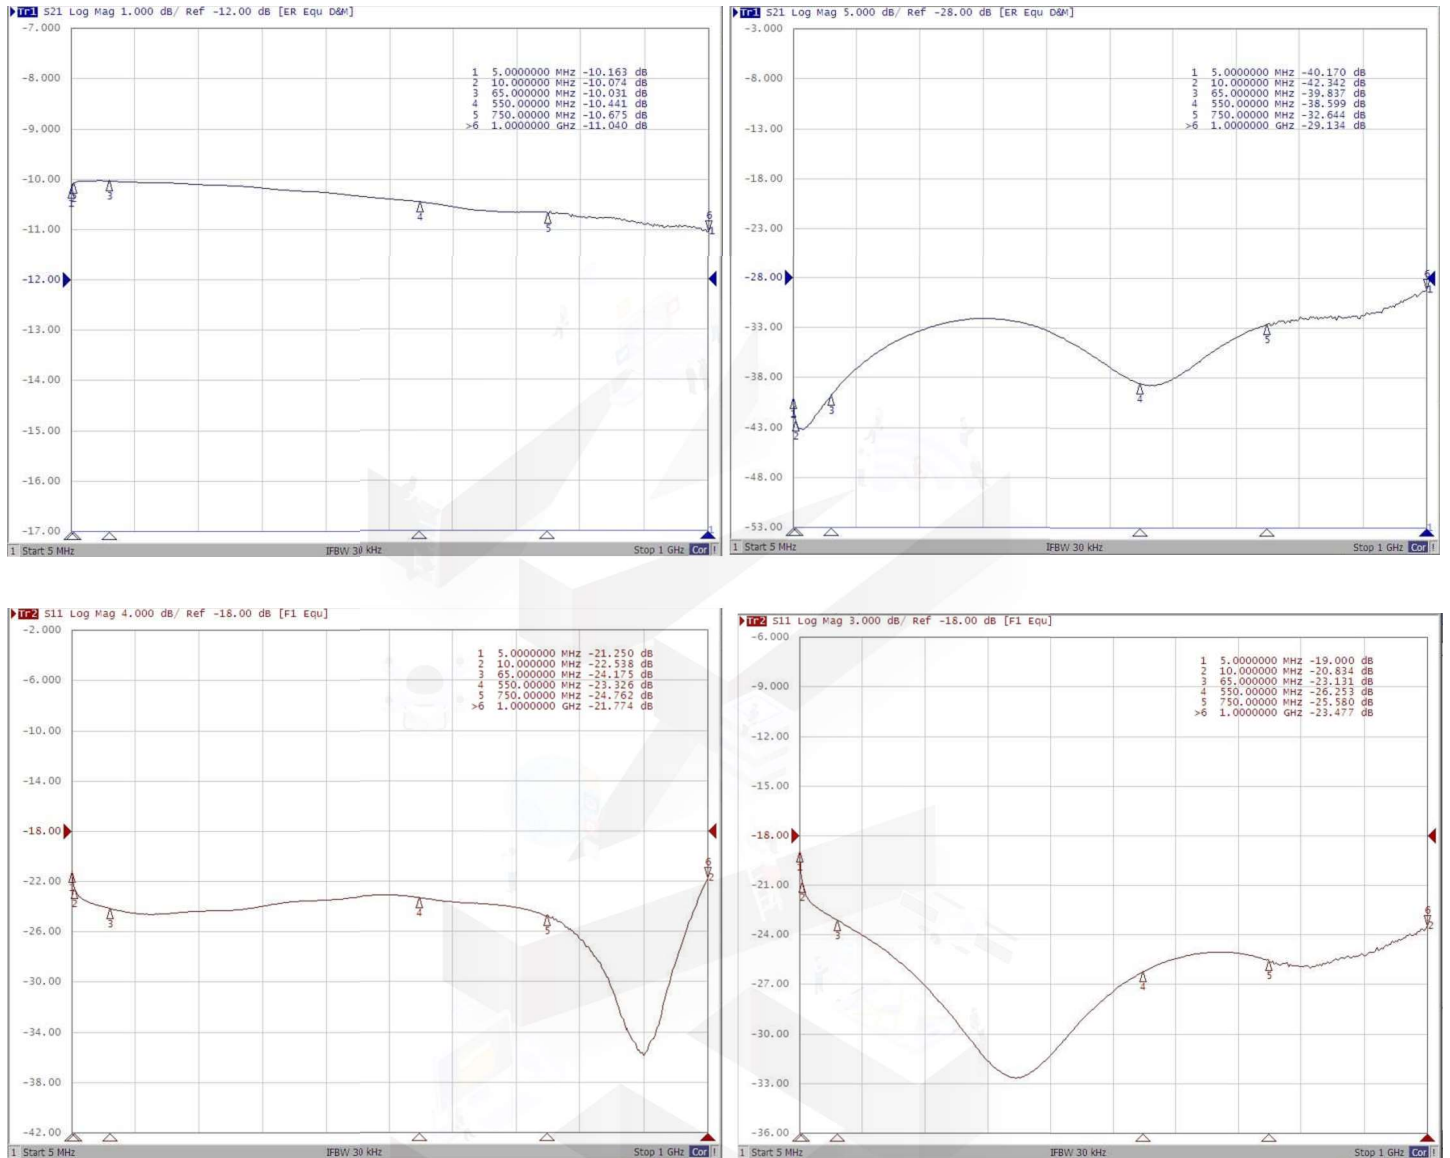

NOTES:  
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

