

ELECTRICAL DATA

FREQUENCY: DC-3GHz

IMPEDANCE: 100Ω

VSWR: 1.60:1@DC-3GHz

INSULATION RESISTANCE: 2000Mega-ohms

DIELECTRIC WITHSTANDING: 500Vrms






MECHANICAL DATA

COUPLING METHOD: SLIDE-IN

TEMPERATURE RANGE: -55~165°C

DURABILITY (MATING/UNMATING): 5000 CYCLES

ROHS COMPLIANCE

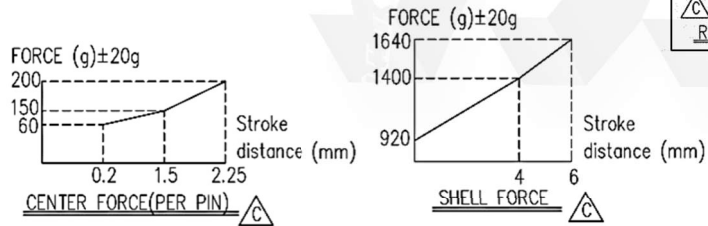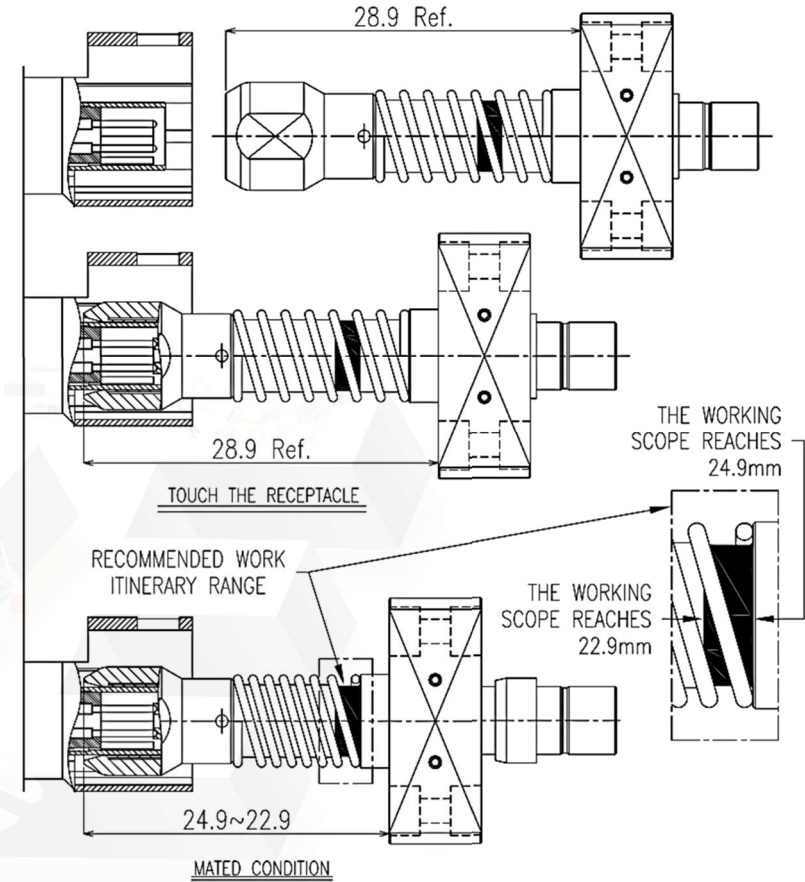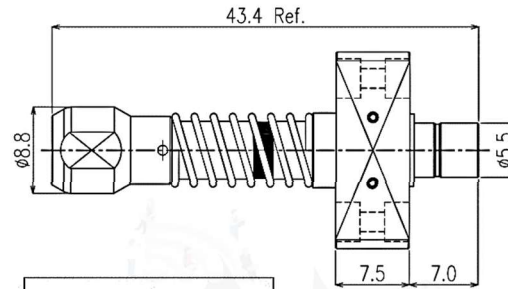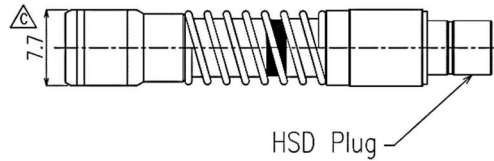

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
BODY/SCREW/WASHER	BRASS,STEEL/NICKEL,GOLD PLATED	TOLERANCE: X=±0.38 X.X=±0.25 X.XX=±0.15	
CONTACT PIN	BRASS/BE-CU,GOLD PLATED	TITLE HSD Male To HSD Female Floating Test Probe	
INSULATOR	TEFLON		
SPRING	SUS304/SWPB		

MVE 芝程科技有限公司
Marvelous Microwave Inc.
www.micro-mve.com sales@micro-mve.com +86-2-2602-0660



PART NO.	MAP-S101	REV	3.1
SIZE: A	SHEET: 1/2	SCALE:	

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY