

ELECTRICAL DATA

FREQUENCY : DC-8GHz

IMPEDANCE: 50Ω

VSWR: 1.6:1MAX.

INSERTION LOSS: 1 dB MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 500 Vrms

WORKING VOLTAGE: 170 Vrms MAX.

INSULATION RESISTANCE: 500Mega Ohms

CENTER CONTACT RESISTANCE: 70 mini Ohm

OUTER CONTACT RESISTANCE: 20 mini Ohm

MECHANICAL DATA



COUPLING METHOD:THREADED

DURABILITY(MATING/UNMATING):10000 Cycles

APPLICATION



Fully mating with MM8030

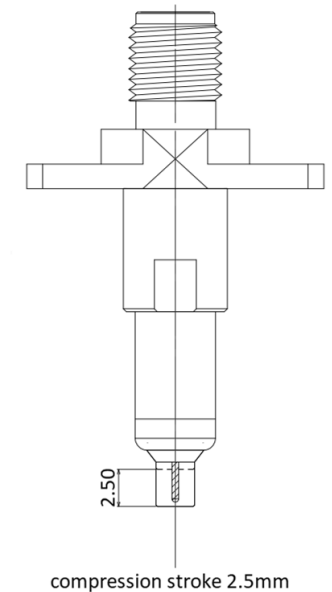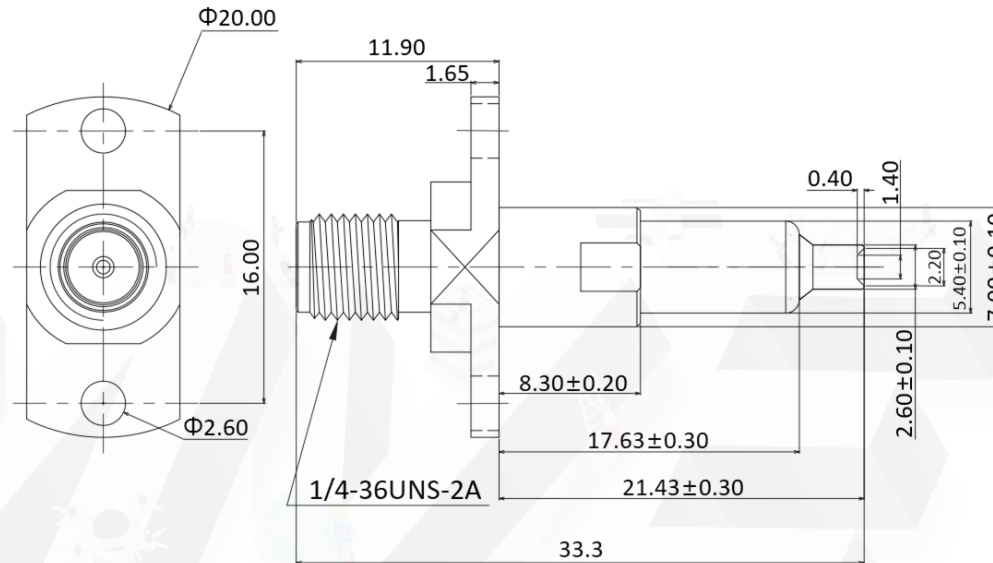

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
BODY	BRASS, GOLD PLATED	TOLERANCE: --	
CENTER PIN	BRASS,GOLD PLATED		
SPRING	SUS304		
INSULATOR	TEFLON		

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY






MVE 芝程科技有限公司
Marvelous Microwave Inc.
www.micro-mve.com sales@micro-mve.com +886-2-2602-0660



PART NO.		REV
MVE1961		5.1
SIZE: A	SHEET: 1/1	SCALE:

Typical Test Result

PART NUMBER	DESCRIPTION
MVE1961	SMA Female To MM8030 Adapter, DC-8GHz

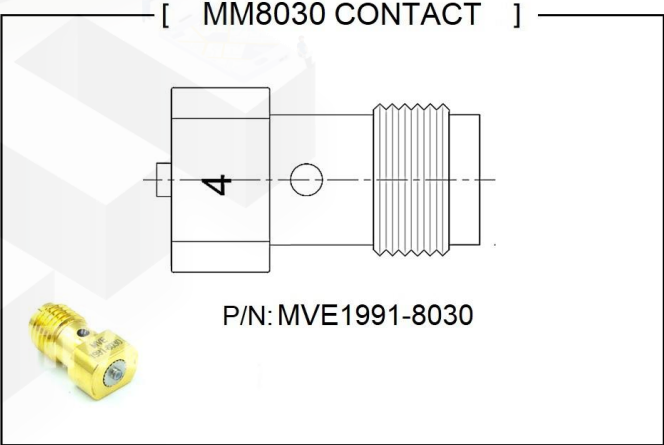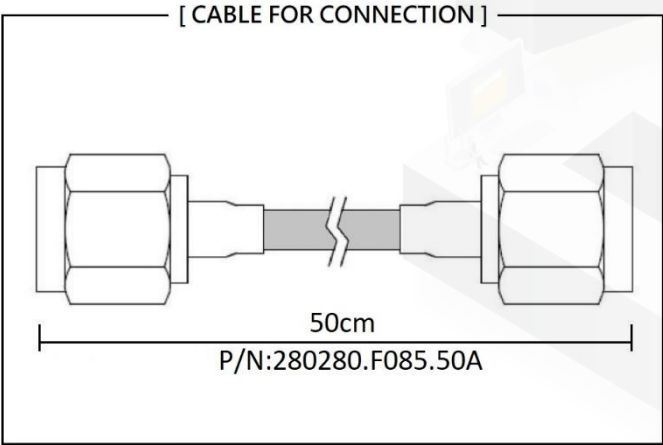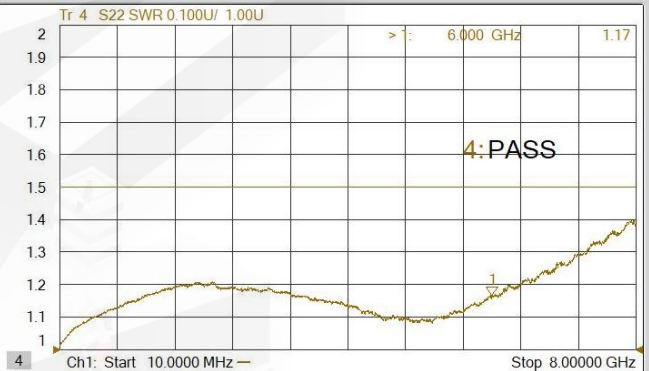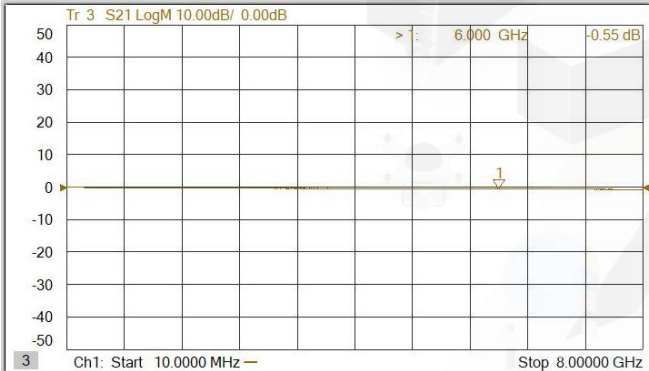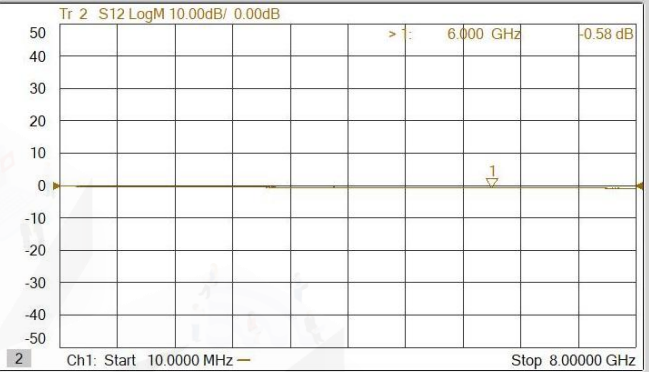

- NOTES**
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY