



FIXED ATTENUATOR
 MVE2771-XX

DC to 18GHz
 N Type 500Watts

Features

- ✓ Frequency Range: DC to 18 GHz
- ✓ Low VSWR
- ✓ High Average Power



Specifications

PART NUMBER	IMPEDANCE	FREQUENCY	STANDARD VALUE	VSWR	POWER RATING	CONNECTOR TYPE
MVE2771-XX	50 OHMS	DC-18GHz	10,20,30 40,50,60	1.50:1	500W @25°C	N Female 1 To N Female 2

-XX: Insert dB value desired

ATTENUATION ACCURACY

- 10dB: ±6.0dB MAX.
- 20dB: ±5.0dB MAX.
- 30dB: ±3.0dB MAX.
- 40-60dB: ±1.5dB MAX.

MATERIAL/FINISH


- HOUSING: ALUMINUM, BLACK ANODIZE
- CONNECTOR: BRASS, TERNARY ALLOY PLATED

ENVIRONMENTAL

TEMPERATURE RANGE: -55 TO +125°C

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

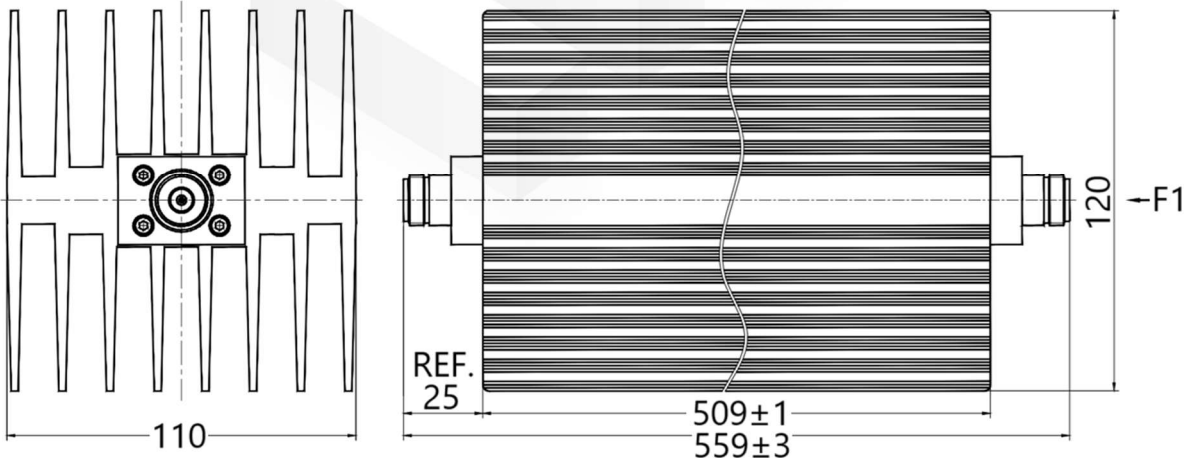

NOTES:


1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





Typical Test Result

(MVE2771-50)

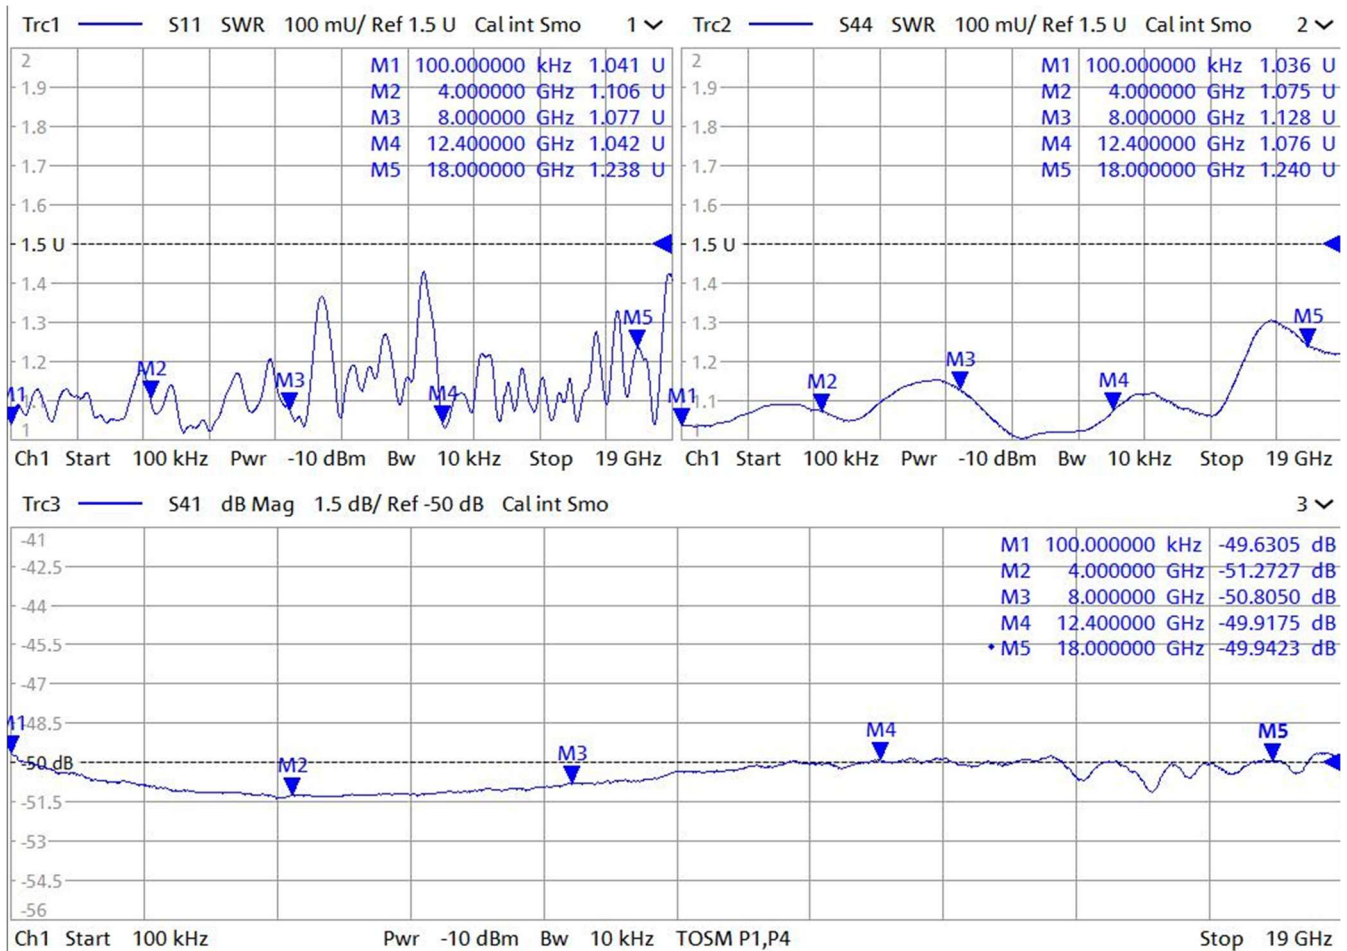

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

