



TERMINATION

6GHz N
1000Watt

Features

- ✓ Frequency Range: DC to 6 GHz
- ✓ Low VSWR
- ✓ High power rating




Specifications

PART NUMBER	MVE5130				
DESCRIPTION	N Male Termination, 1000W DC-6GHz, with 110V Axial Fan				
<table> <tr> <th>ELECTRICAL</th><th>MATERIALS</th></tr> <tr> <td> FREQUENCY: DC-6GHz IMPEDANCE: 50Ohm VSWR: 1.4:1 MAX. TEMPERATURE RANGE: -55~+125°C POWER RATING: 1000W@25°C PEAK POWER: 10kW (5 Microsecond Pulse Width, 5% Duty Cycle) </td><td> CONNECTOR: COPPER, TERNARY ALLOY PLATED </td></tr> </table>		ELECTRICAL	MATERIALS	FREQUENCY: DC-6GHz IMPEDANCE: 50Ohm VSWR: 1.4:1 MAX. TEMPERATURE RANGE: -55~+125°C POWER RATING: 1000W@25°C PEAK POWER: 10kW (5 Microsecond Pulse Width, 5% Duty Cycle)	CONNECTOR: COPPER, TERNARY ALLOY PLATED
ELECTRICAL	MATERIALS				
FREQUENCY: DC-6GHz IMPEDANCE: 50Ohm VSWR: 1.4:1 MAX. TEMPERATURE RANGE: -55~+125°C POWER RATING: 1000W@25°C PEAK POWER: 10kW (5 Microsecond Pulse Width, 5% Duty Cycle)	CONNECTOR: COPPER, TERNARY ALLOY PLATED				

Tolerance: ±0.5%

Outline Drawing (Unit: mm)

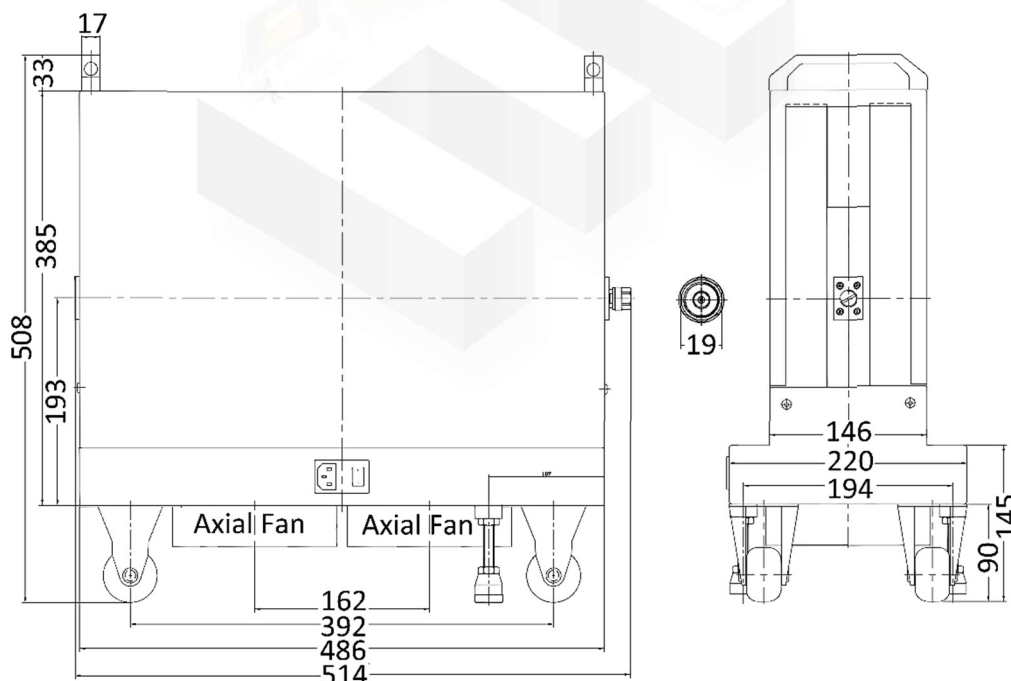


NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY






Power Rating Curve

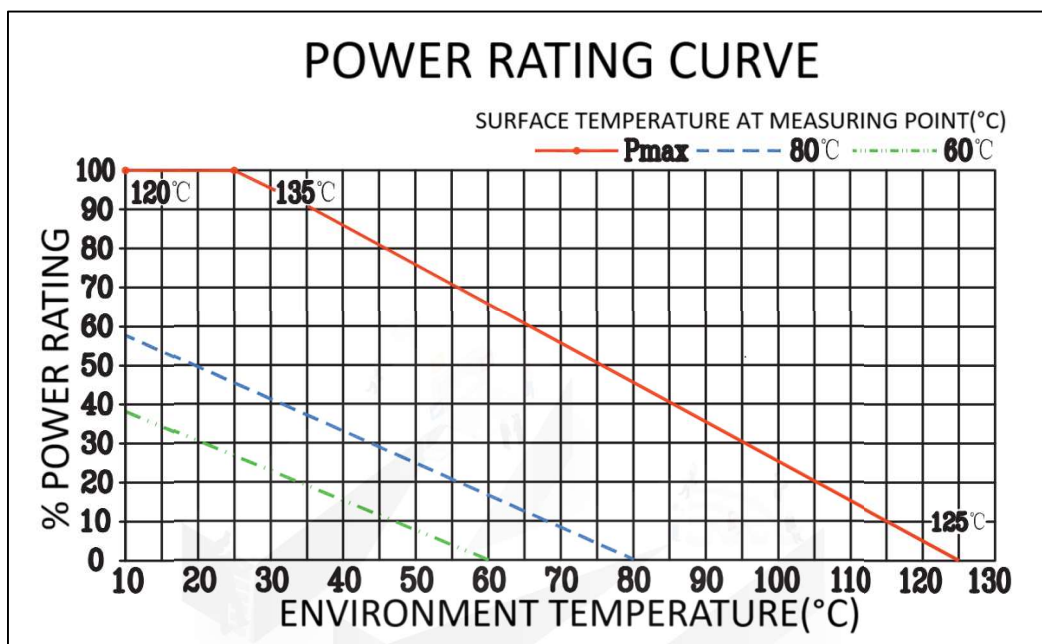

Typical Test Report

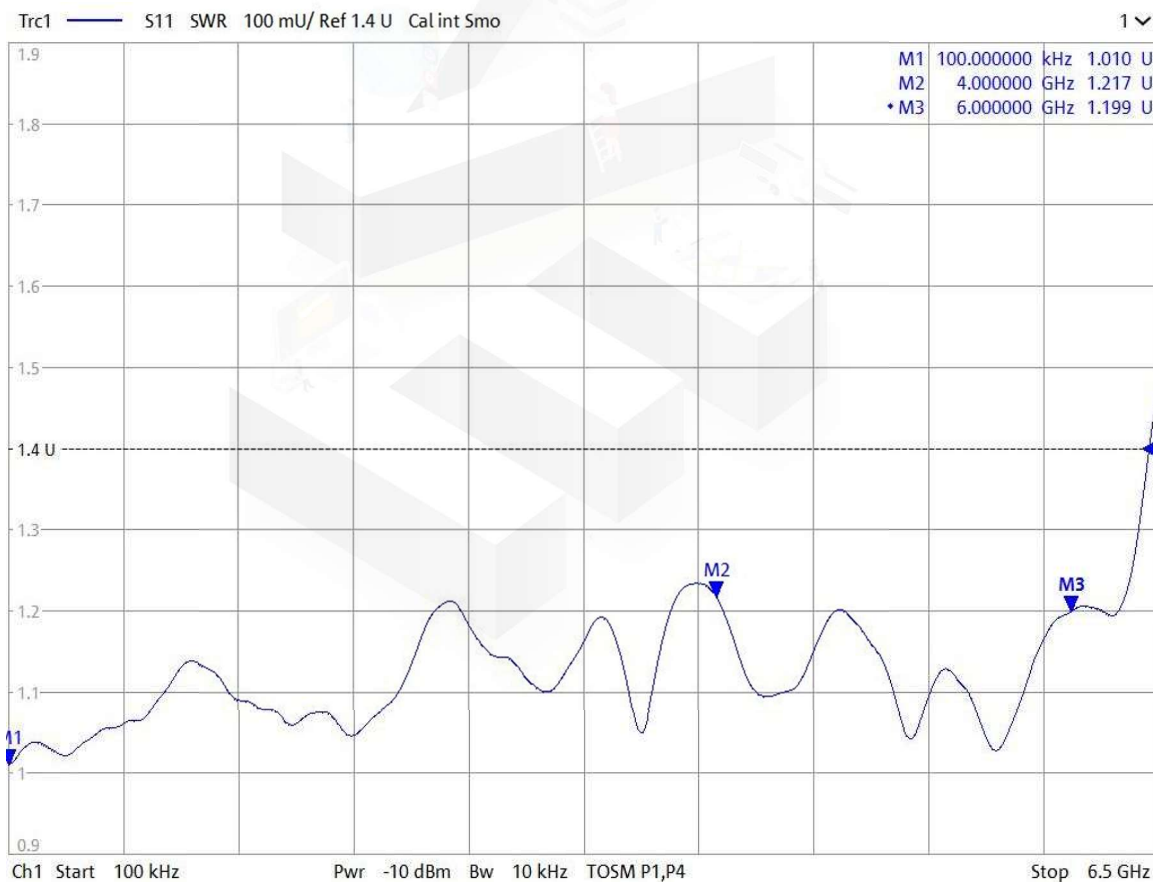

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

